

# LV1A-H-4L-063A-480V

3PH+N / 4-LINE + GROUND HEMP FILTER

## SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

RATED CURRENT: 63A/LINE

OPERATING TEMP.: -40 TO 50C

HIPOT (L-G): 2200VDC

TERMINALS: M6


DISCHARGE VOLTAGE (@277V)  
<20V IN 1 MINUTE

VOLTAGE DROP: <2% MAX AT FULL  
RATED UNITY LOAD

PERFORMANCE: Mil-STD-188-125-1A

TYP. WEIGHT, LBS (KG): 200 (91)

MANUFACTURED FOR WALL MOUNTING  
FOR INDOOR CONTROLLED ENVIRONMENTS.  
ALL EMI SEAMS 100% WELDED AND OUTPUT  
ACCESS SEALED WITH EMI GASKET.

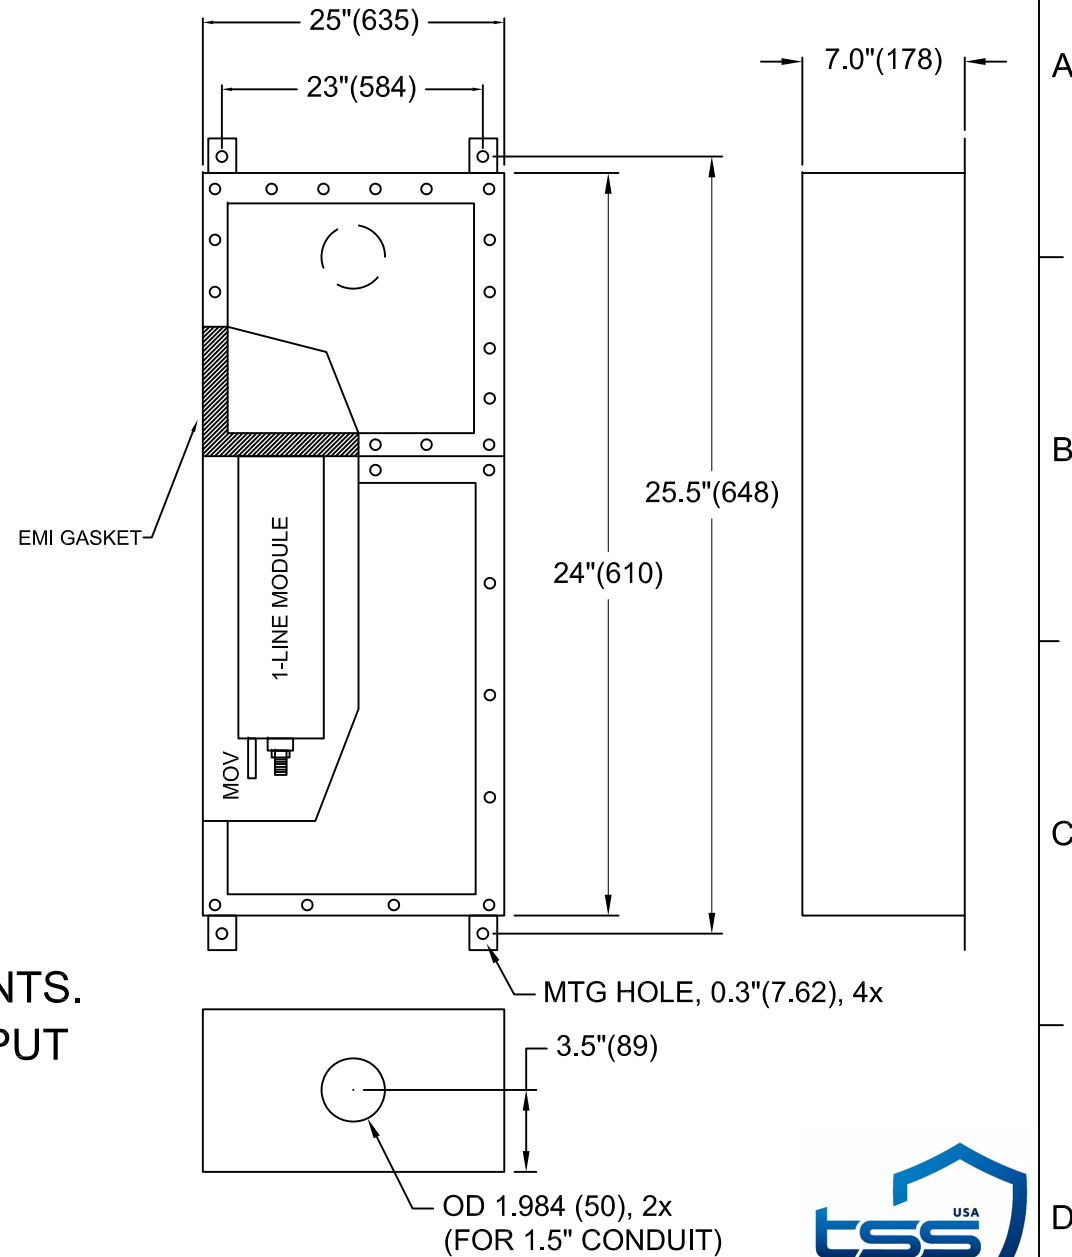

NOTES: 1. M6 GROUND STUD PROVIDED  
IN EACH ACCESS AREA.



PROPRIETARY NOTE:  
NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.  
THIS DOCUMENT IS THE PROPERTY OF TSSUSA,  
AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE  
OR IN PART OR USED FOR MANUFACTURING PURPOSES  
BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.