

LV1A-H-4L-100A-480V

3PH+N / 4-LINE + GROUND HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

RATED CURRENT: 100A/LINE

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

TERMINALS: M10

DISCHARGE VOLTAGE (@277V)

<20V IN 1 MINUTE

VOLTAGE DROP: <2% MAX AT FULL
RATED UNITY LOAD

PERFORMANCE: Mil-STD-188-125-1A


TYP. WEIGHT, LBS (KG): 216 (98)

GND STUD: M10 (EACH ACCESS AREA)

MANUFACTURED FOR WALL MOUNTING
FOR INDOOR CONTROLLED ENVIRONMENTS.
ALL EMI SEAMS 100% WELDED AND OUTPUT
ACCESS SEALED WITH EMI GASKET.



Conforms to
UL STD 1283

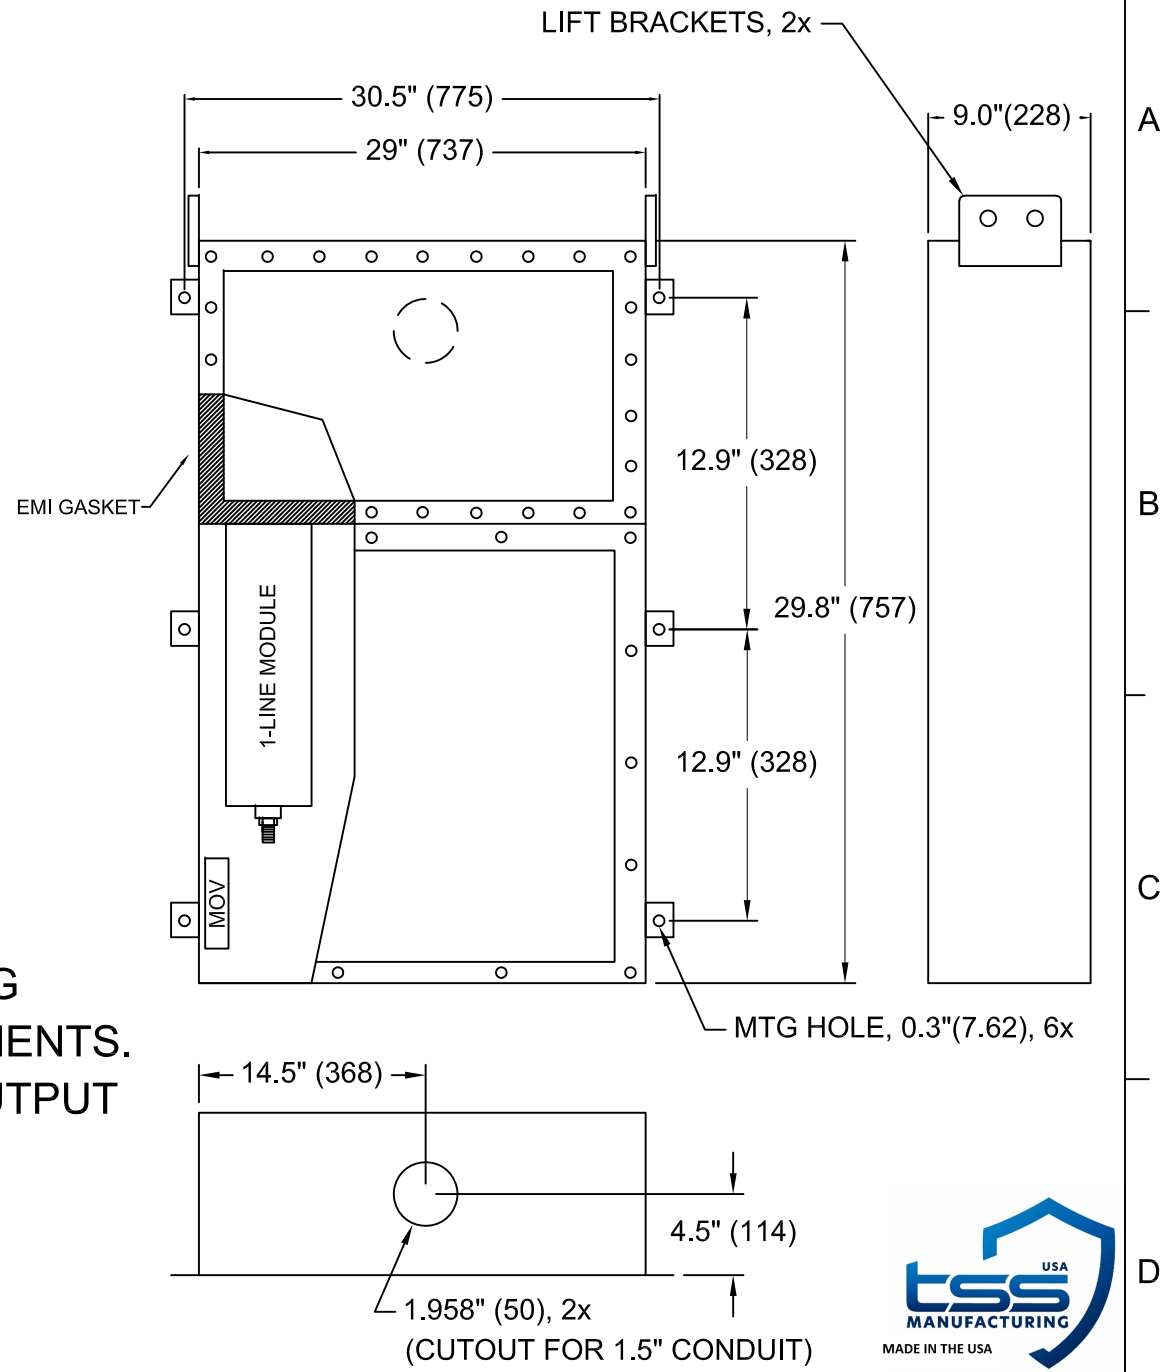

LIFT BRACKETS, 2x

30.5" (775)

29" (737)

9.0" (228)

EMI GASKET

1-LINE MODULE

MOV

12.9" (328)

29.8" (757)

12.9" (328)

MTG HOLE, 0.3" (7.62), 6x

14.5" (368)

4.5" (114)

1.958" (50), 2x
(CUTOUT FOR 1.5" CONDUIT)



PROPRIETARY NOTE:
NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.
THIS DOCUMENT IS THE PROPERTY OF TSSUSA
AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE
OR IN PART OR USED FOR MANUFACTURING PURPOSES
BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.