


LV1A-H-4L-200A-480V
 3PH+N / 4-LINE + GROUND HEMP FILTER

SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- RATED CURRENT: 200A/LINE
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- TERMINALS: M12
- DISCHARGE VOLTAGE (@277V)
 <20V IN 1 MINUTE
- VOLTAGE DROP: <2% MAX AT FULL
 RATED UNITY LOAD
- PERFORMANCE: Mil-STD-188-125-1A
- TYP. WEIGHT, LBS (KG): 348 (158)
- GND STUD: M10 (EACH ACCESS AREA)

MANUFACTURED FOR WALL MOUNTING
 FOR INDOOR CONTROLLED ENVIRONMENTS.
 ALL EMI SEAMS 100% WELDED AND OUTPUT
 ACCESS SEALED WITH EMI GASKET.

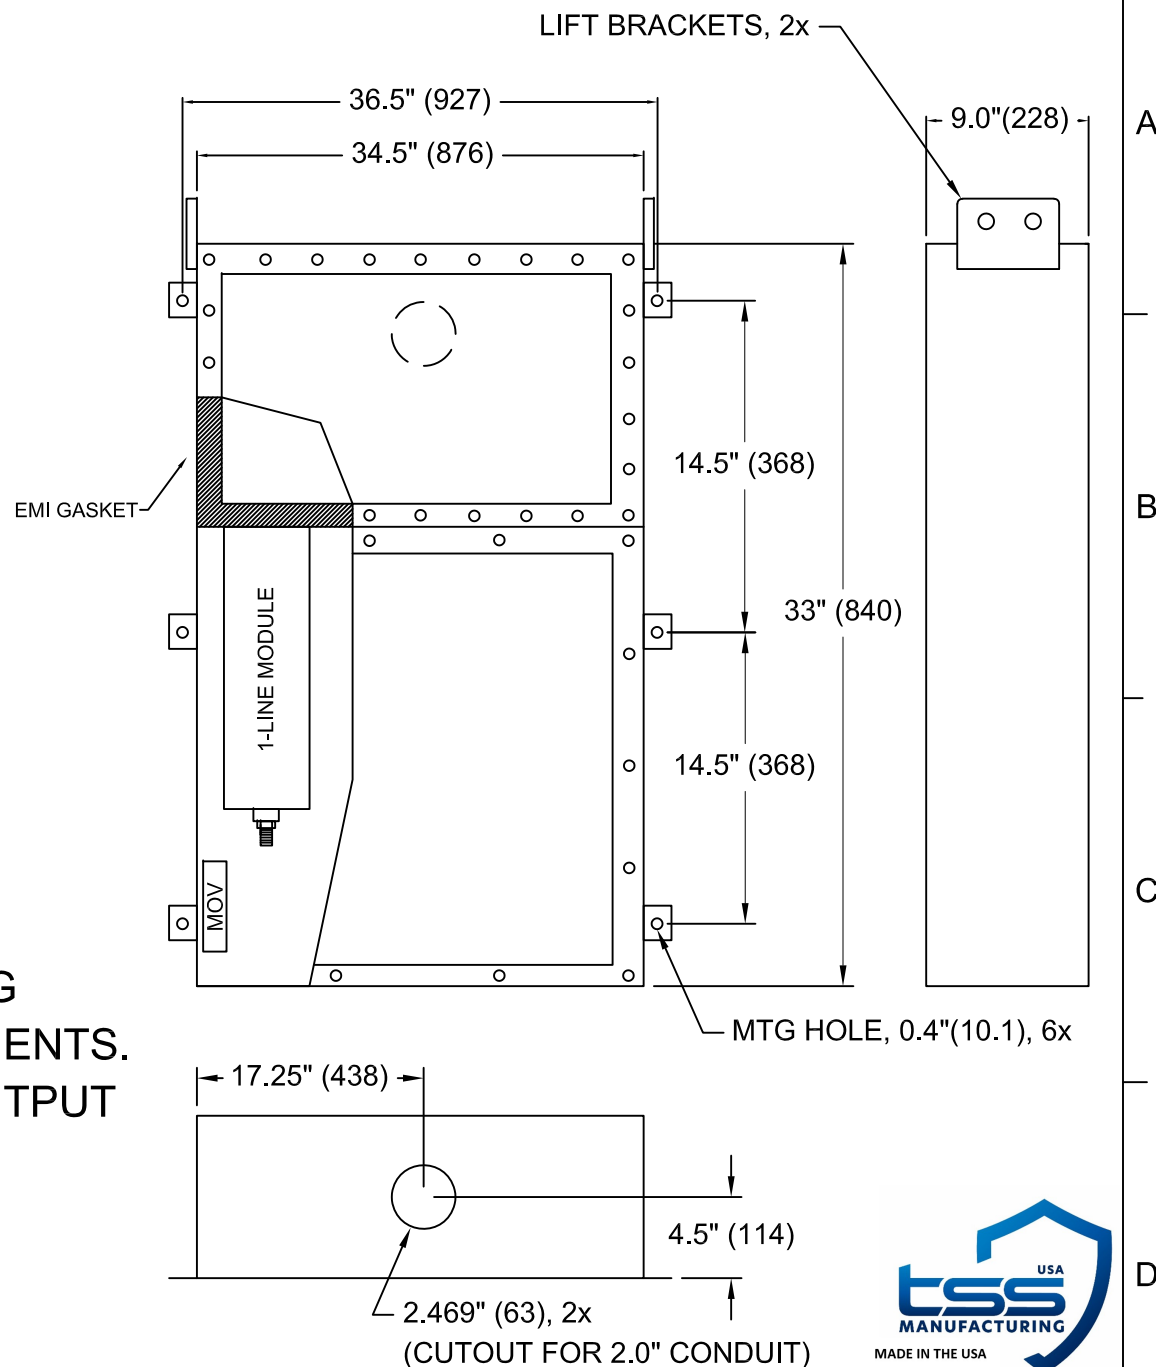

PROPRIETARY NOTE:
 NOTICE TO ALL PERSONS RECEIVING THIS DRAWING:
 THIS DOCUMENT IS THE PROPERTY OF TSSUSA
 AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE
 OR IN PART OR USED FOR MANUFACTURING PURPOSES
 BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.