

# LV1A-H-4L-400A-480V

3PH+N / 4-LINE + GROUND HEMP FILTER

## SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

RATED CURRENT: 400A/LINE

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

TERMINALS: DUAL M12

DISCHARGE VOLTAGE (@277V)

<20V IN 1 MINUTE

VOLTAGE DROP: <2% MAX AT FULL  
RATED UNITY LOAD

PERFORMANCE: Mil-STD-188-125-1A

TYP. WEIGHT, LBS (KG): 605 (275)


GND STUD: M10 (EACH ACCESS AREA)

MANUFACTURED FOR WALL MOUNTING  
FOR INDOOR CONTROLLED ENVIRONMENTS.  
ALL EMI SEAMS 100% WELDED AND OUTPUT  
ACCESS SEALED WITH EMI GASKET.



Conforms to  
UL STD 1283

5026929

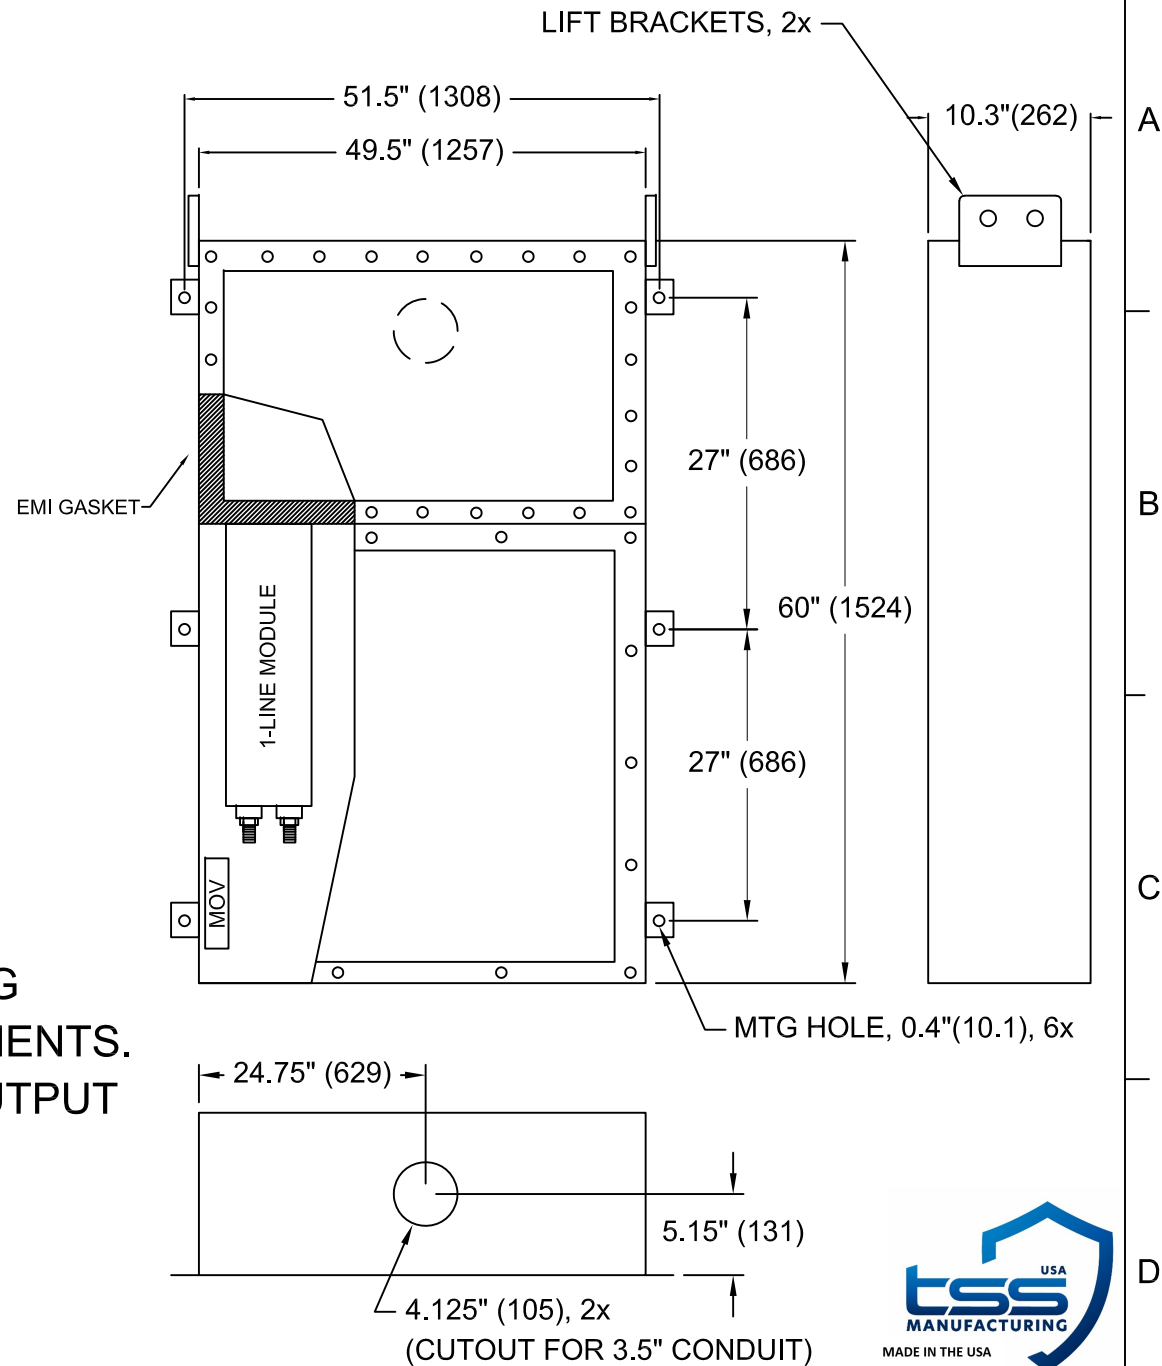

PROPRIETARY NOTE:  
NOTICE TO ALL PERSONS RECEIVING THIS DRAWING:  
THIS DOCUMENT IS THE PROPERTY OF TSSUSA  
AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE  
OR IN PART OR USED FOR MANUFACTURING PURPOSES  
BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.