

LV1A-H-3L-800A-480V

TSS 800A, 3-LINE HEMP FILTER

PROPRIETARY NOTE:
 NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.
 THIS DOCUMENT IS THE PROPERTY OF TSSUSA,
 AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE
 OR IN PART OR USED FOR MANUFACTURING PURPOSES
 BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.




SPECIFICATIONS


- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 800A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <2% MAX AT UNITY LOAD
- PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH
 TERMINATION ENCLOSURE

Input and output termination enclosure
 dimensions are for reference only

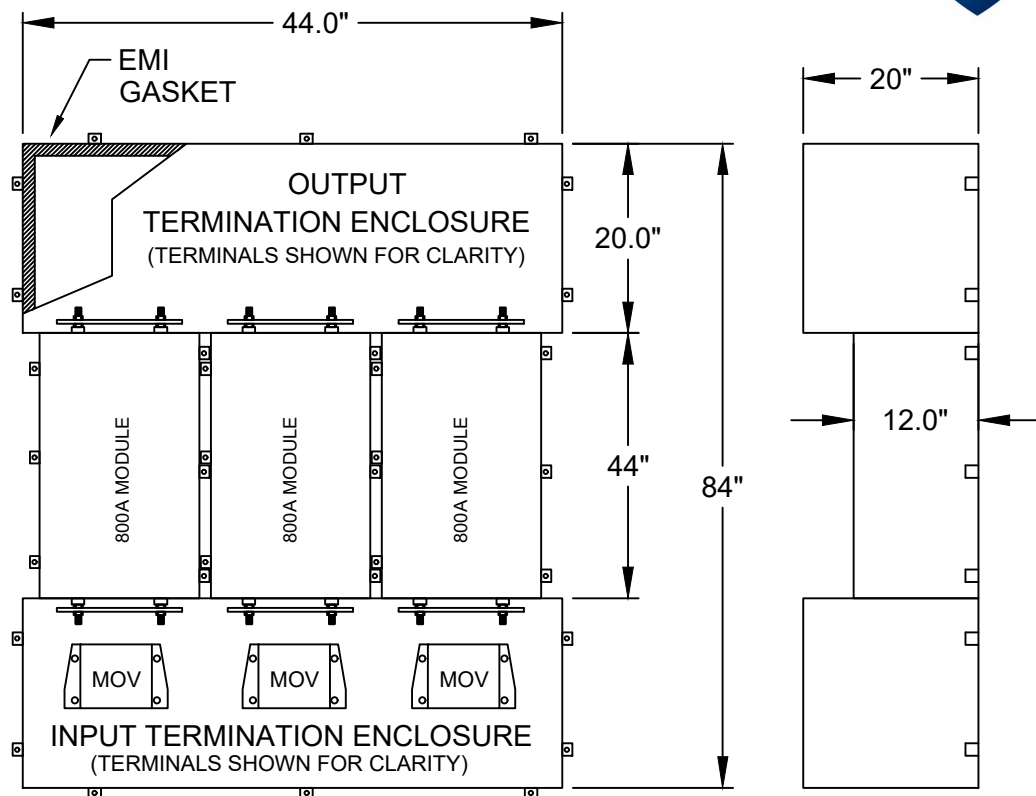

PER LINE END VIEW

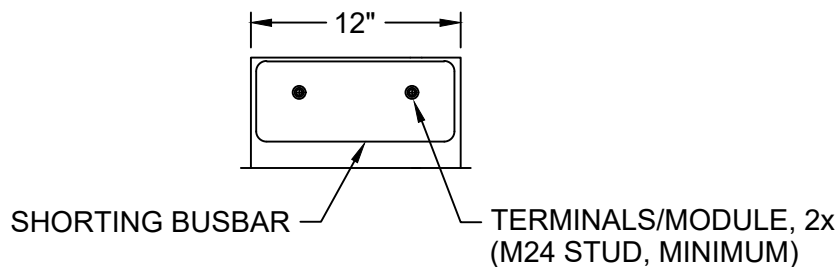

SPECIFICATIONS SUBJECT TO CHANGE