

LV1A-H-4L-600A-480V

TSS 600A, 4-LINE HEMP FILTER

PROPRIETARY NOTE:


NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA, AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.




SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 600A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 65C
 HIPOT (L-G): 2200VDC
 DISCHARGE VOLT. (@277V): <30V IN 30S
 VOLT. DROP: <2% MAX AT UNITY LOAD
 PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH TERMINATION ENCLOSURE

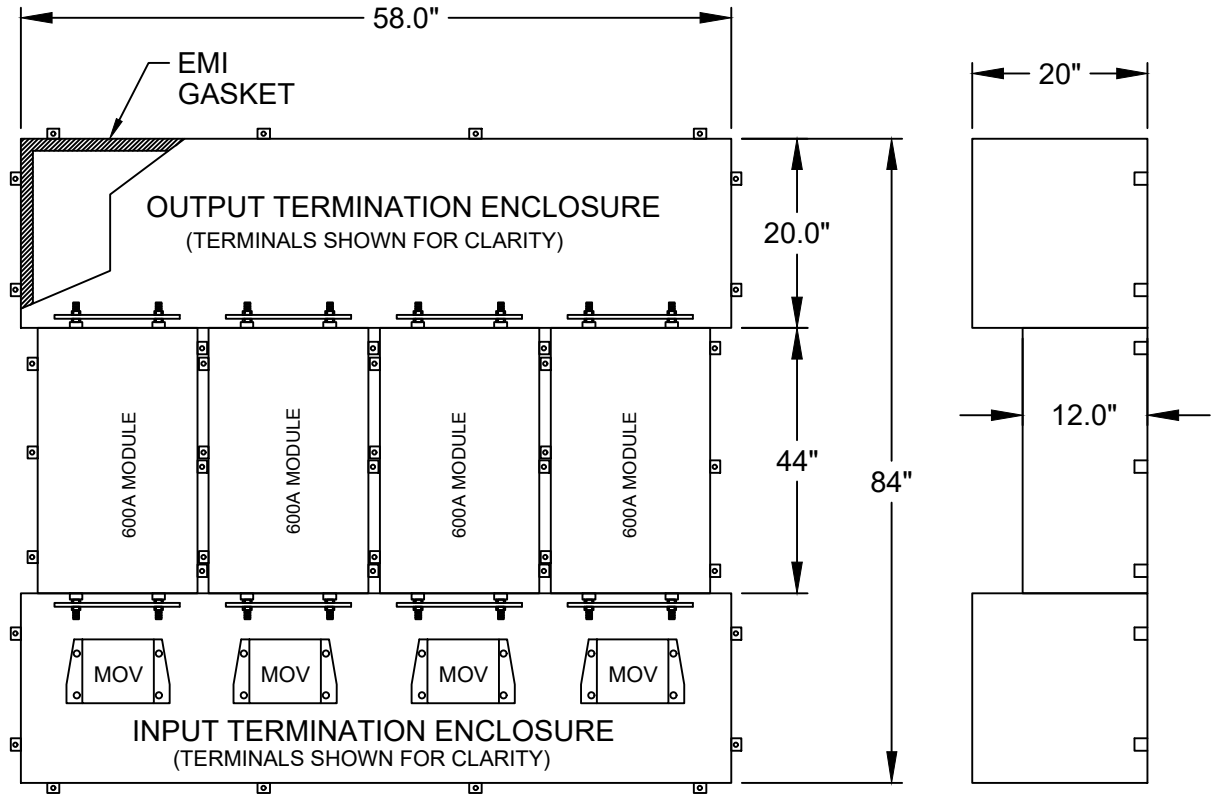

PER LINE END VIEW

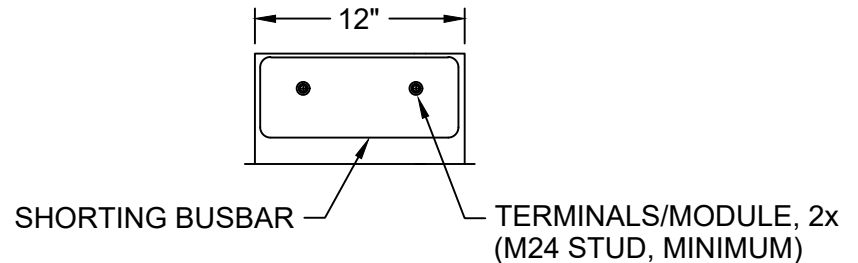

SPECIFICATIONS SUBJECT TO CHANGE