

LV1A-H-4L-800A-480V

TSS 800A, 4-LINE HEMP FILTER

PROPRIETARY NOTE:

NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA. AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.




SPECIFICATIONS


- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 800A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <2% MAX AT UNITY LOAD
- PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH TERMINATION ENCLOSURE

Input and output termination enclosure dimensions for reference only.

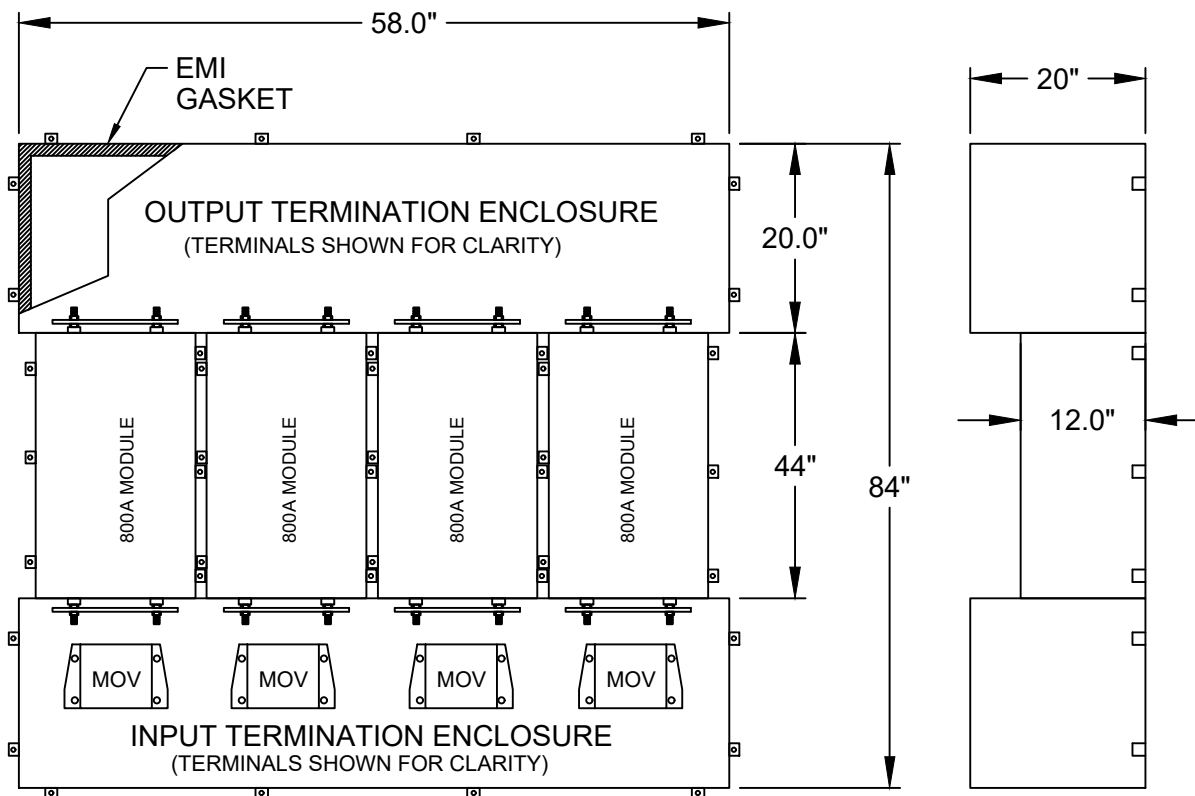

PER LINE END VIEW

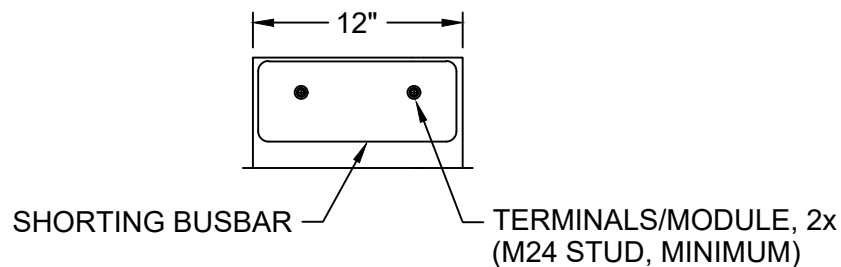

SPECIFICATIONS SUBJECT TO CHANGE