

# LV1A-H-4L-1200A-480V

## TSS 1200A, 4LINE HEMP FILTER


**PROPRIETARY NOTE:**  
 NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.  
 THIS DOCUMENT IS THE PROPERTY OF TSSUSA.  
 AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE  
 OR IN PART OR USED FOR MANUFACTURING PURPOSES  
 BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.



### SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- MAX CURRENT: 1200A/LINE
- FREQUENCY: 50/60HZ
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- DISCHARGE VOLT. (@277V): <30V IN 30S
- VOLT. DROP: <2% MAX AT UNITY LOAD
- PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH  
 TERMINATION ENCLOSURE

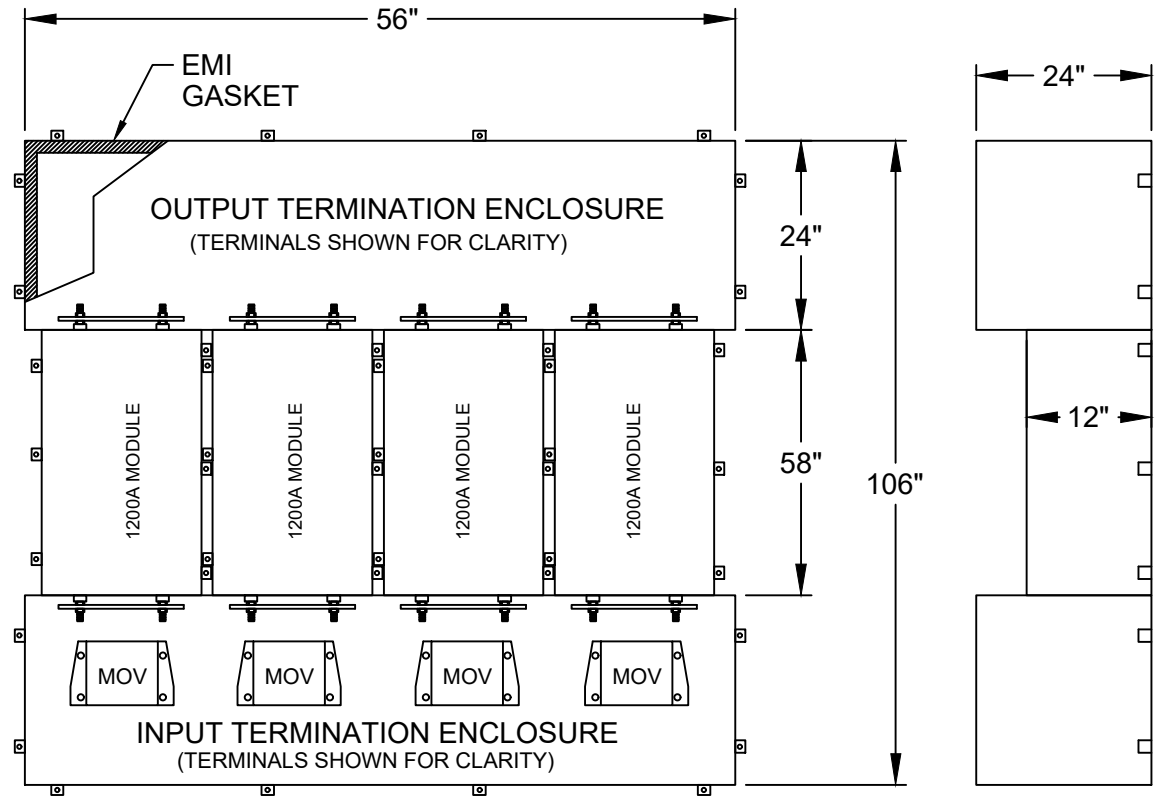

PER LINE END VIEW

