

# LV1A-H-4L-1600A-480V

## TSS 1600A, 4LINE HEMP FILTER


**PROPRIETARY NOTE:**  
 NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.  
 THIS DOCUMENT IS THE PROPERTY OF TSSUSA.  
 AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE  
 OR IN PART OR USED FOR MANUFACTURING PURPOSES  
 BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.



### SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 1600A/LINE  
 FREQUENCY: 50/60HZ  
 OPERATING TEMP.: -40 TO 65C  
 HIPOT (L-G): 2200VDC  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 VOLT. DROP: <2% MAX AT UNITY LOAD  
 PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH  
 TERMINATION ENCLOSURE

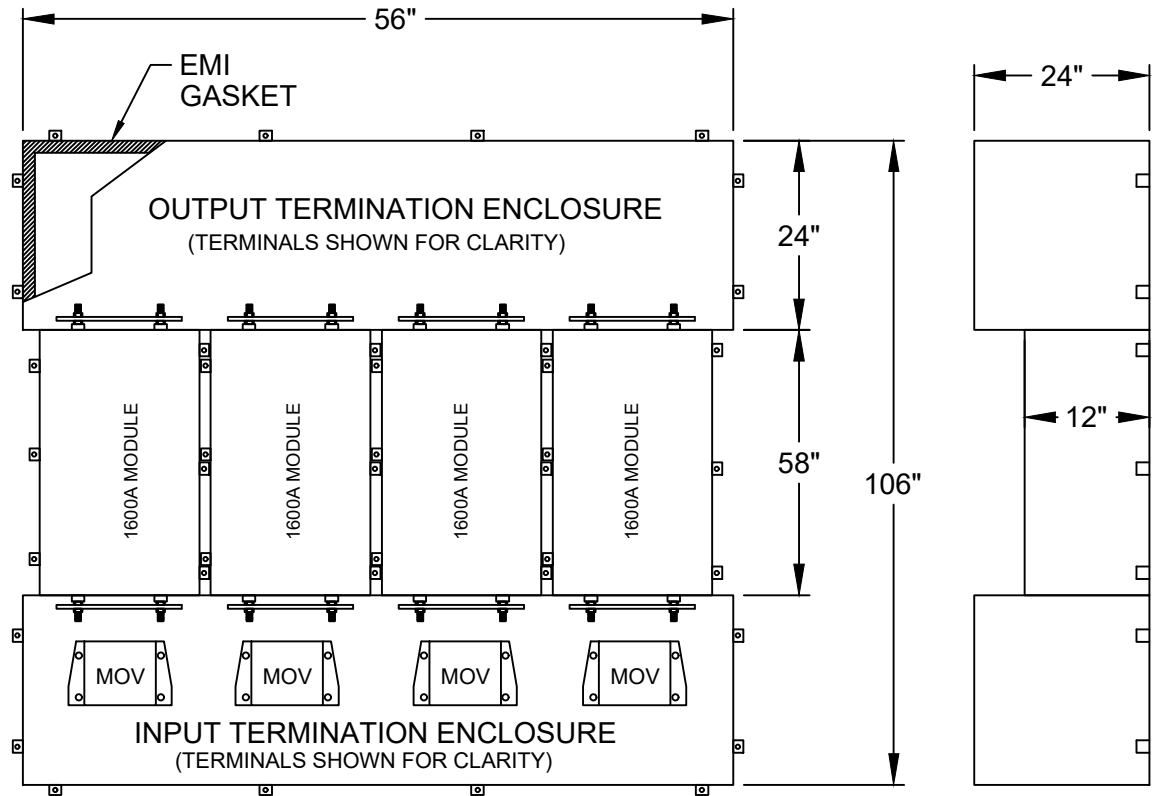

PER LINE END VIEW

