

LV1A-H-3L-4000A-480V

TSS 4KA, 3LINE HEMP FILTER


PROPRIETARY NOTE:
 NOTICE TO ALL PERSONS RECEIVING THIS DRAWING.
 THIS DOCUMENT IS THE PROPERTY OF TSSUSA,
 AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE
 OR IN PART OR USED FOR MANUFACTURING PURPOSES
 BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.




SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
 MAX CURRENT: 4000A/LINE
 FREQUENCY: 50/60HZ
 OPERATING TEMP.: -40 TO 65C
 HIPOT (L-G): 2200VDC
 DISCHARGE VOLT. (@277V): <30V IN 30S
 VOLT. DROP: <2% MAX AT UNITY LOAD
 PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH
 TERMINATION ENCLOSURE

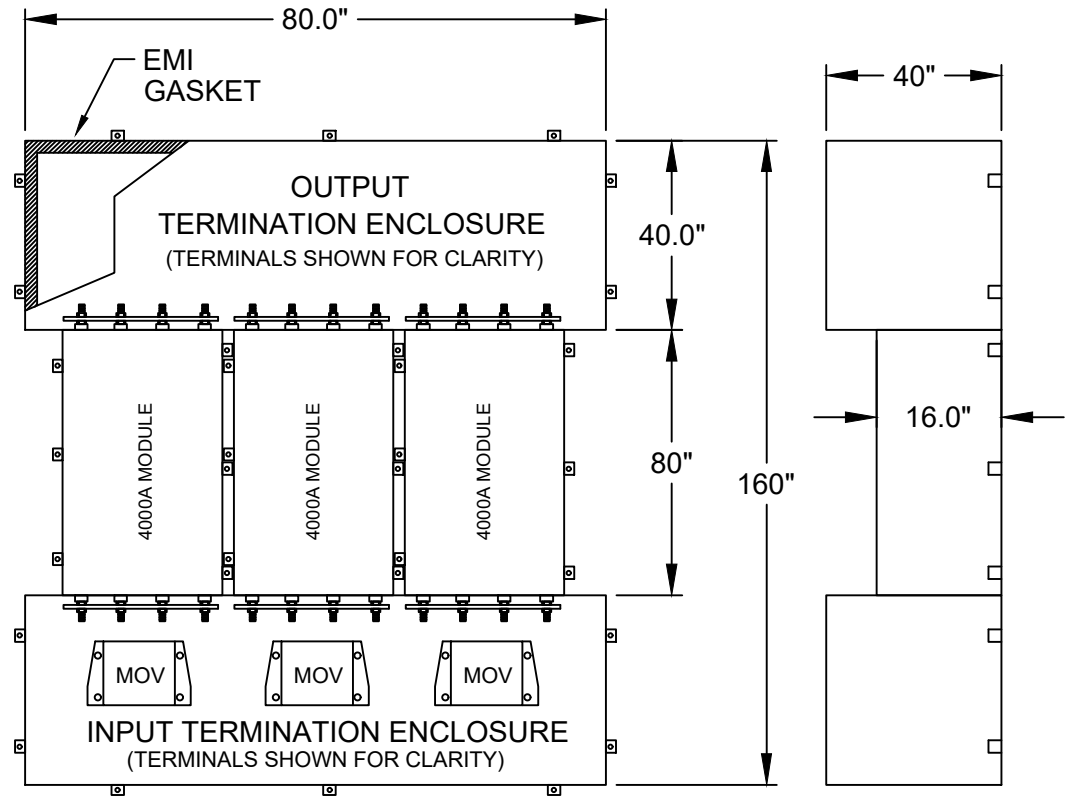

PER LINE END VIEW



SHORTING BUSBAR

TERMINALS/MODULE, 8x
 (M24 STUD, MINIMUM)

SPECIFICATIONS SUBJECT TO CHANGE

www.tssusamfg.com