

# LV1A-H-4L-4000A-480V

## TSS 4KA, 4LINE HEMP FILTER

**PROPRIETARY NOTE:**


NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA. AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF PREMIER FILTERS.




### SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC  
 MAX CURRENT: 4000A/LINE  
 FREQUENCY: 50/60HZ  
 OPERATING TEMP.: -40 TO 65C  
 HIPOT (L-G): 2200VDC  
 DISCHARGE VOLT. (@277V): <30V IN 30S  
 VOLT. DROP: <2% MAX AT UNITY LOAD  
 PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH TERMINATION ENCLOSURE

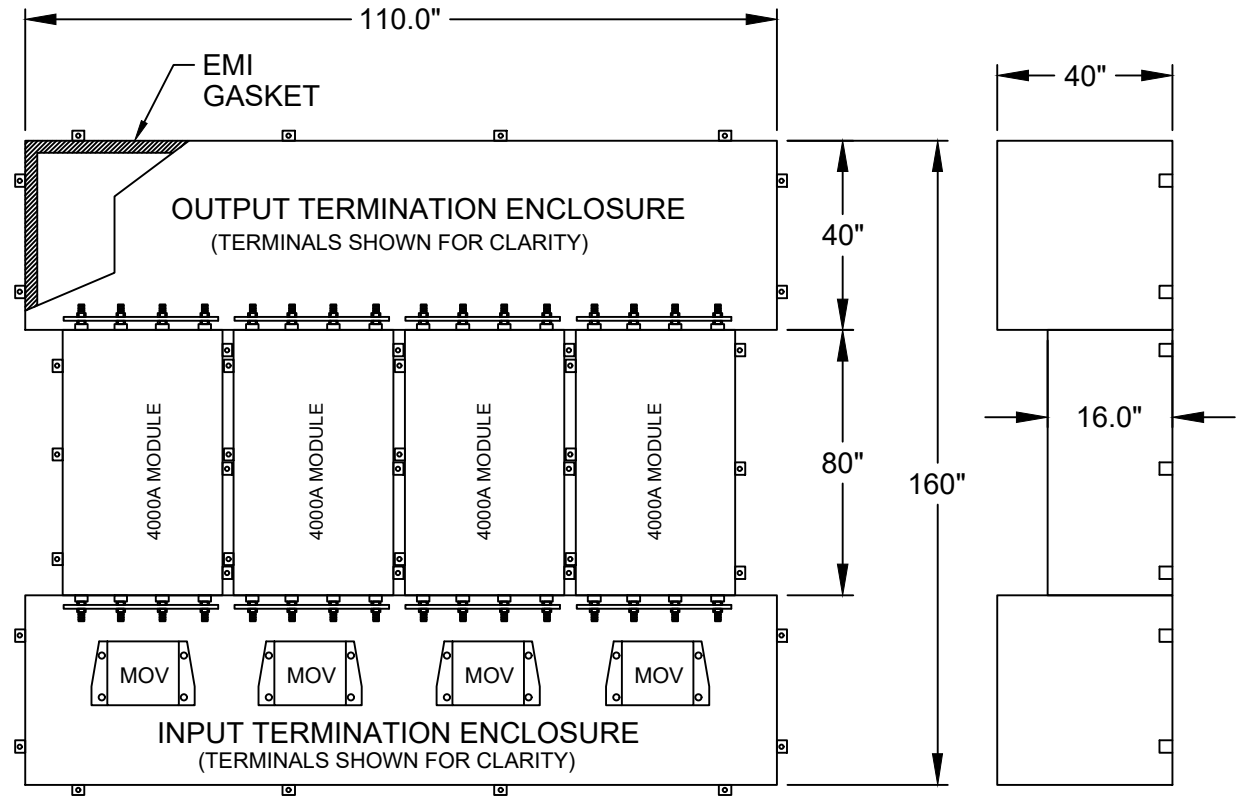

### PER LINE END VIEW

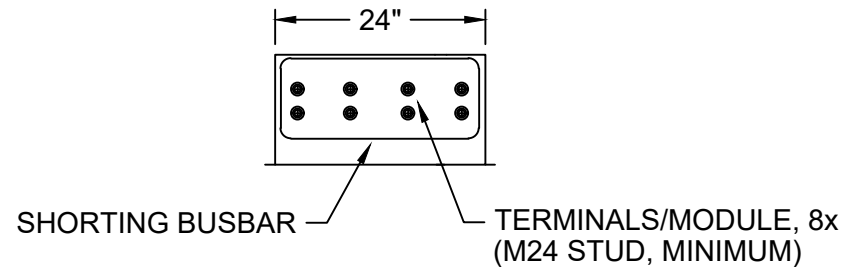

SPECIFICATIONS SUBJECT TO CHANGE

www.tssusamfg.com