1-LINE + GROUND 150A HEMP FILTER

SPECIFICATIONS

RATED VOLTAGE: 0-277VAC
RATED CURRENT: 150A
FREQUENCY: 50/60HZ
OPER. TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: M10
DISCHARGE VOLTAGE (@277V): <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
PERFORMANCE: MIL-STD-188-125-1A
TYP. WEIGHT, LBS(KG): 85(38.6)
MOV: RATED 70KA, MINIMUM
MANUFACTURED IN ACCORDANCE
WITH THE FOLLOWING STANDARDS:

MIL-STD-220
MIL-F-15733
MIL-STD-810

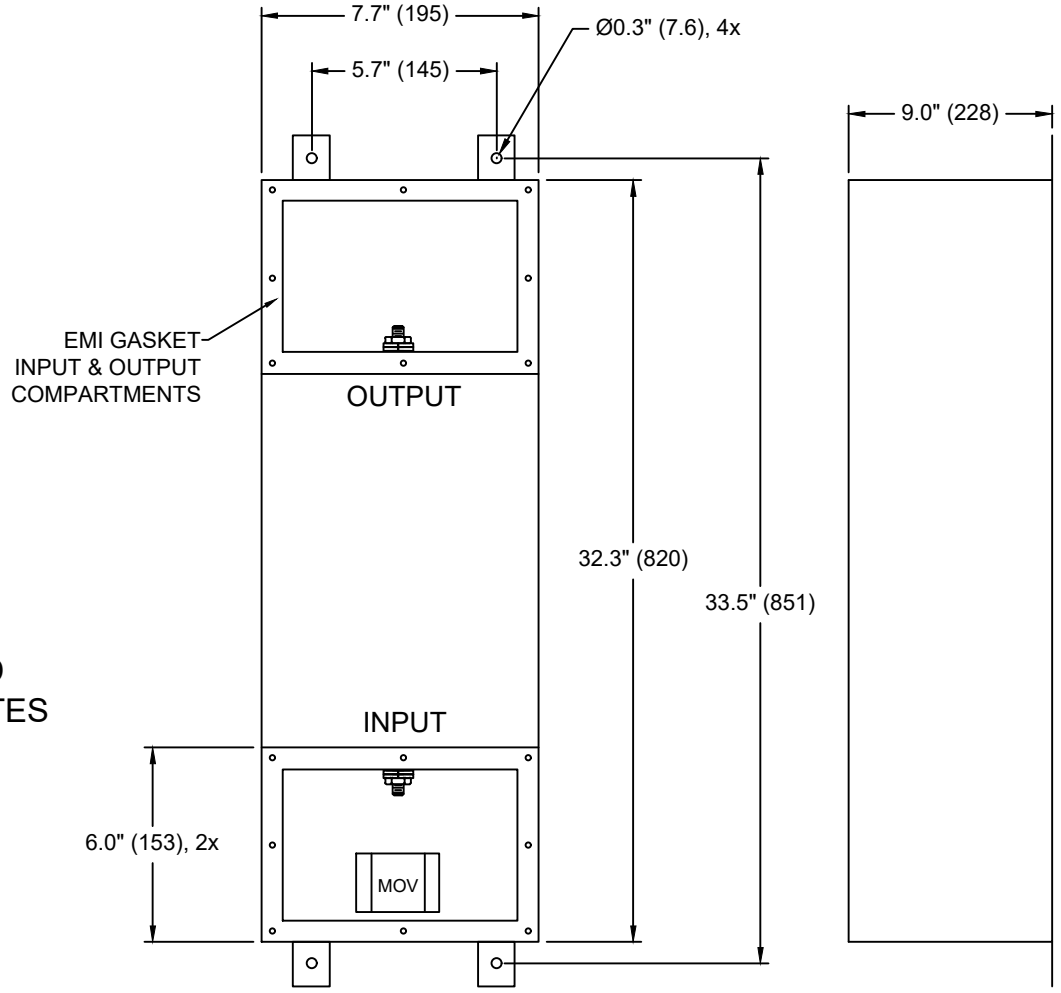

COVERS REMOVED FOR CLARITY

5026929
Conforms to UL STD 1283

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-H-1L-150A-277V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE:
56NX9	NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.