# 1-LINE + GROUND HEMP FILTER - OPEN STUDS

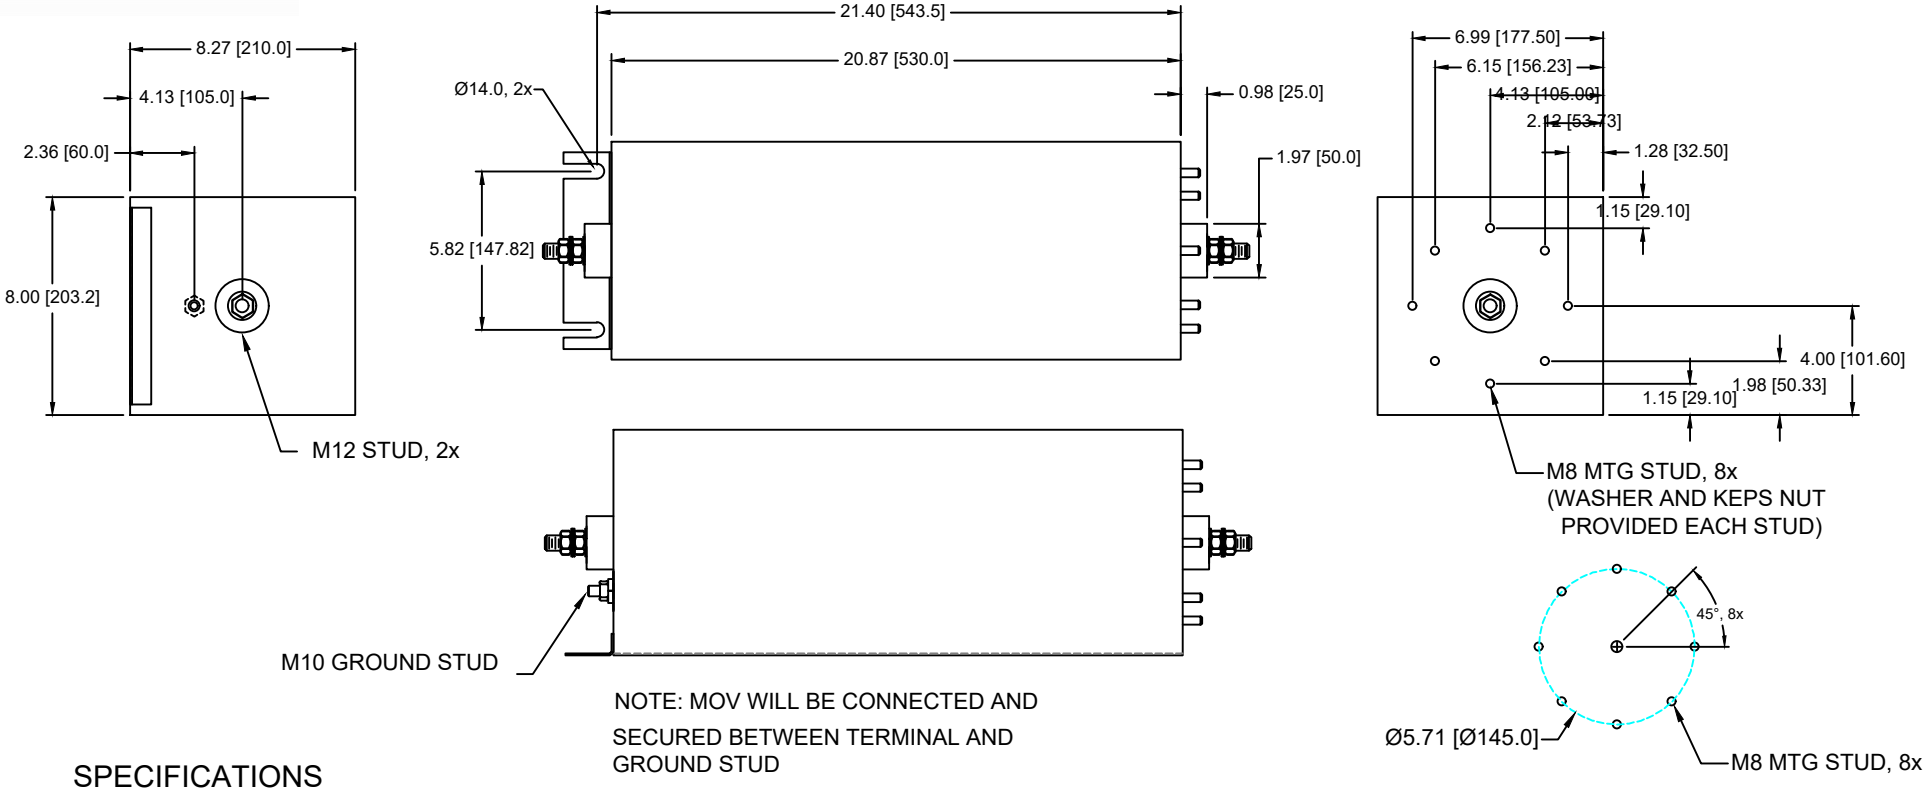


NOTE: MOV WILL BE CONNECTED AND SECURED BETWEEN TERMINAL AND GROUND STUD

## SPECIFICATIONS

MAX VOLTAGE: 277VAC
RATED CURRENT: 200A
OPER. TEMP: -40 TO 65C
HIPOT(L-G): 2200VDC
DISCHARGE VOLTAGE (@277V): <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
EST. WEIGHT, LBS(KG): 45(20.5)
PERFORMANCE: Mil-STD-188-125-1A
MOV: LITTELFUSE V421HF34, OR EQUIV.

**Made in the USA**

| LV1A-H-1L-200A-277V | |
|---|---|
| **TSS USA, LLC** | REV: |
| CAGE CODE | **PROPRIETARY NOTE:** NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER. |
| 56NX9 | |