1-LINE + GROUND HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277VAC
RATED CURRENT: 200A/LINE
OPERATING TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: M12
DISCHARGE VOLTAGE (@277V)
<30V IN 30S
VOLTAGE DROP: <2% MAX AT FULL
RATED UNITY LOAD
PERFORMANCE: Mil-STD-188-125-1A
EST. WEIGHT, LBS (KG): 85 (38.6)
MOV: TDK B72260B0421K, OR EQUIV.

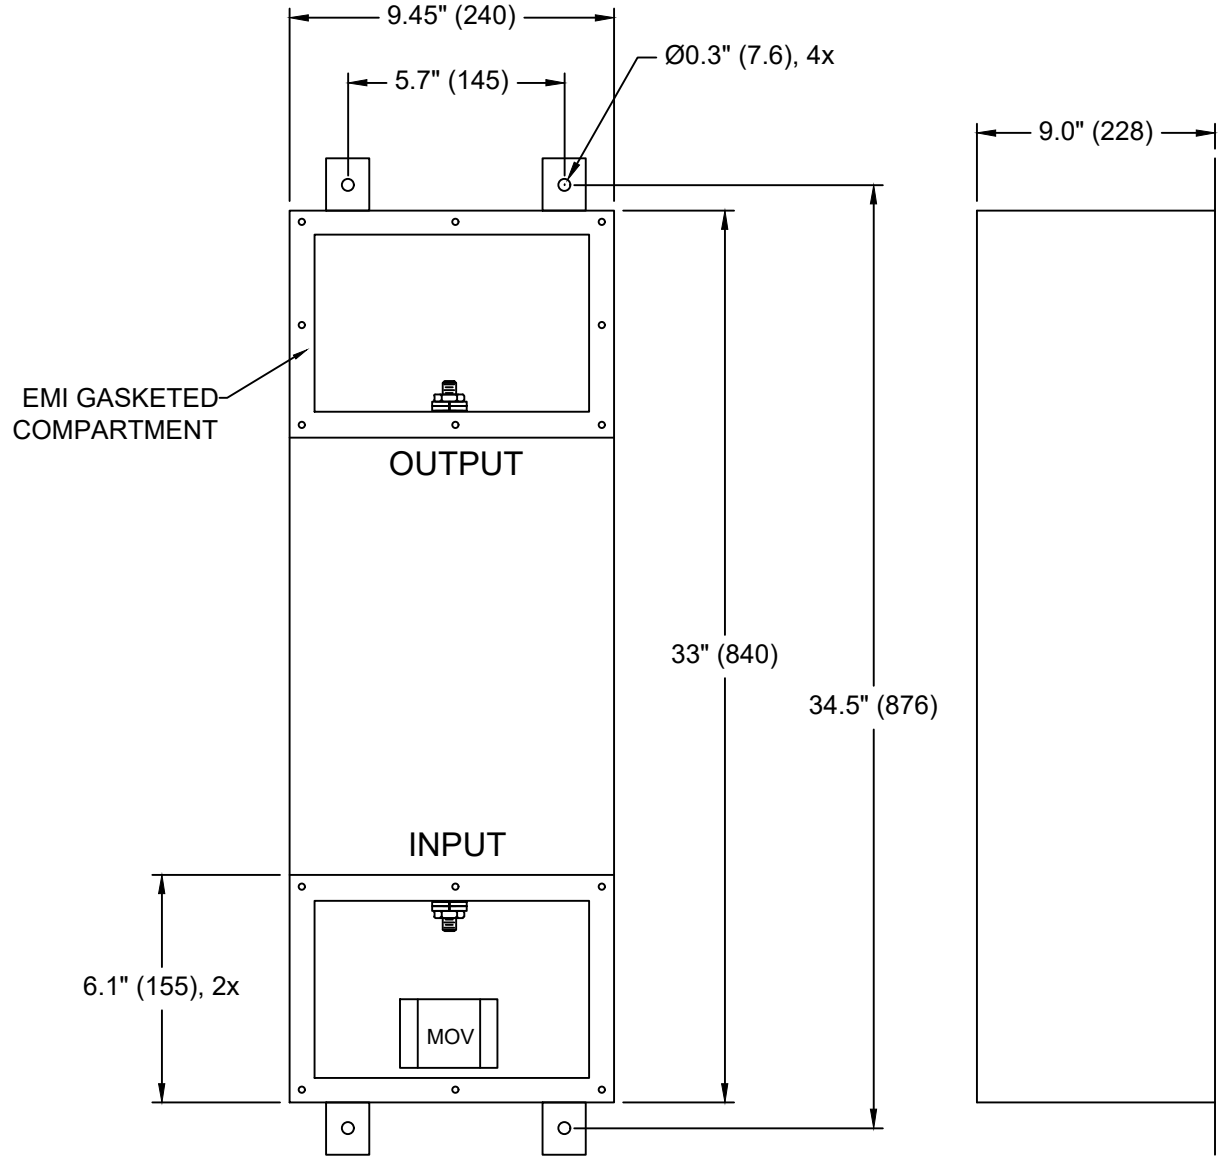

COVERS REMOVED FOR CLARITY

INTERTEK ETL LISTED US Conforms to UL STD 1283
5026929

Made in the USA

LV1A-H-1L-200A-277V	
TSS USA, LLC	REV:
CAGE CODE	**PROPRIETARY NOTE:** NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	