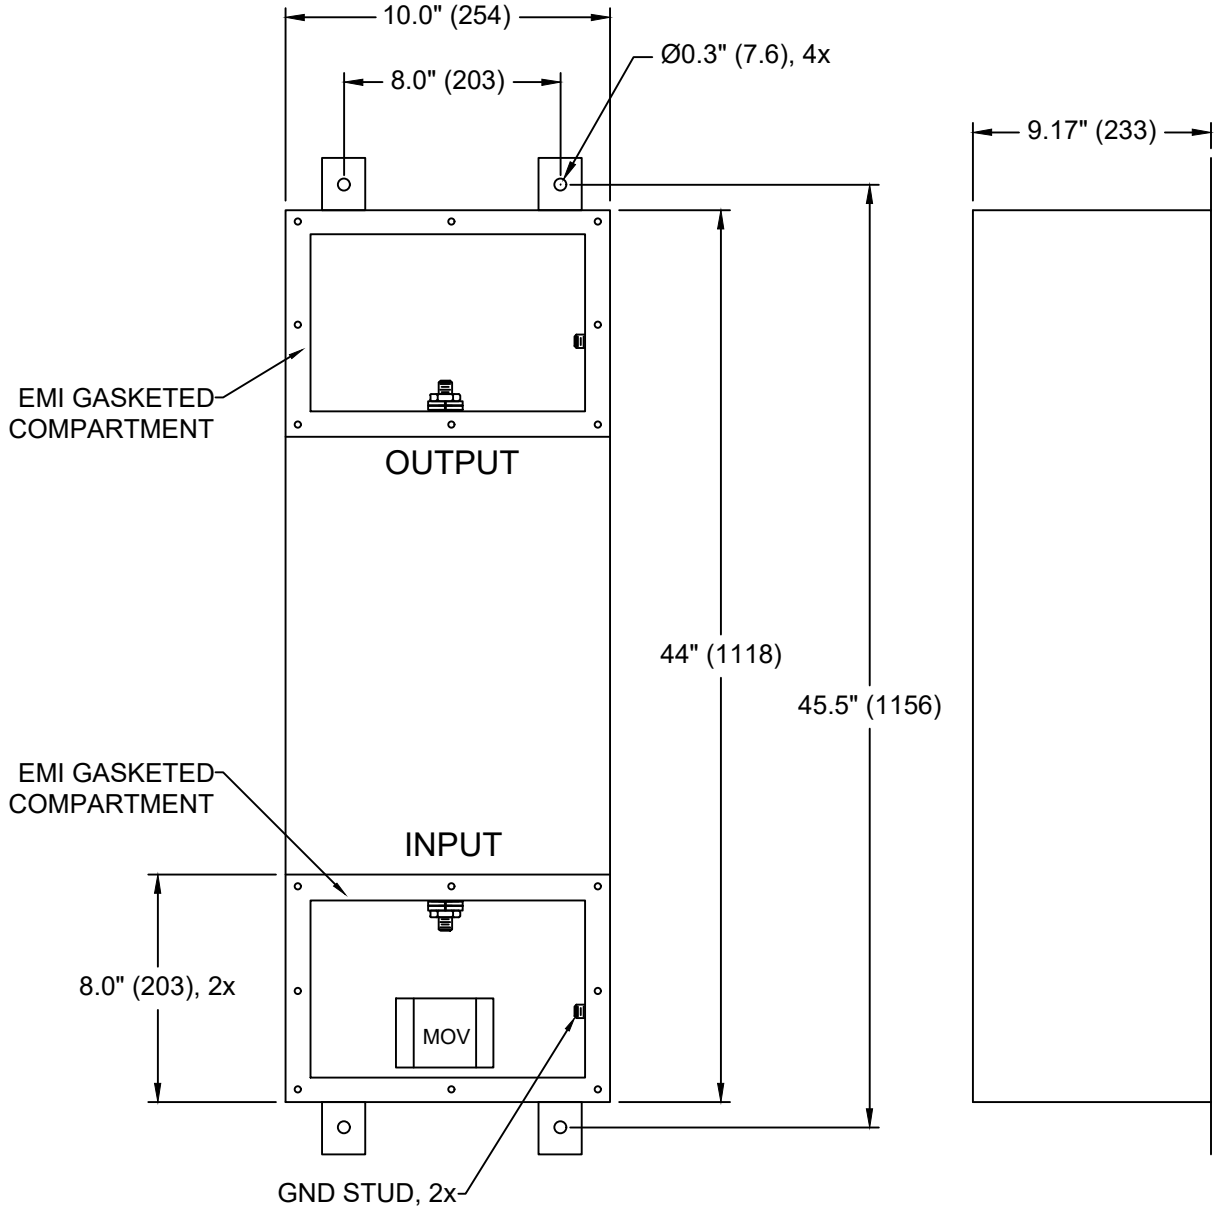


# 1-LINE + GROUND HEMP FILTER

SPECIFICATIONS

- RATED VOLTAGE: 0-277VAC
- RATED CURRENT: 250A
- FREQUENCY: 50/60HZ
- OPER. TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- TERMINALS: M12
- DISCHARGE VOLTAGE (@277V)
  - <30V IN 30S
- VOLTAGE DROP: <2% AT FULL
  - RATED UNITY LOAD
- OVERLOAD: 140% RATED CURRENT
  - FOR 15 MINUTES
- PERFORMANCE: MIL-STD-188-125-1A
- TYP. WEIGHT, LBS(KG): 115 (52.3)
- MOV: RATED 70KA, MINIMUM
- MANUFACTURED IN ACCORDANCE
  - WITH THE FOLLOWING STANDARDS:

MIL-STD-220
MIL-F-15733
MIL-STD-810

INTERTEK ETL LISTED US Conforms to UL STD 1283
5026929

**Made in the USA**

| | |
|---|---|
| **LV1A-H-1L-250A-277V** | |
| TSS USA, LLC | REV: |
| CAGE CODE | PROPRIETARY NOTE: |
| 56NX9 | NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER. |