SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC

MAX CURRENT: 32A/LINE

FREQUENCY: 50/60HZ

OPERATING TEMP.: -40 TO 65C

HIPOT (L-G): 2200VDC

(PRIOR TO INSTALLING DISCHARGE RESISTORS)

DISCHARGE VOLT. (@277V): <30V in 30S

VOLT. DROP: <2% MAX AT FULL RATED UNITY LOAD

OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES

PERFORMANCE: MIL-STD-188-125-1A

TERMINALS: M6 STUDS

TYP. WEIGHT, LBS(KG): 38(17.3)

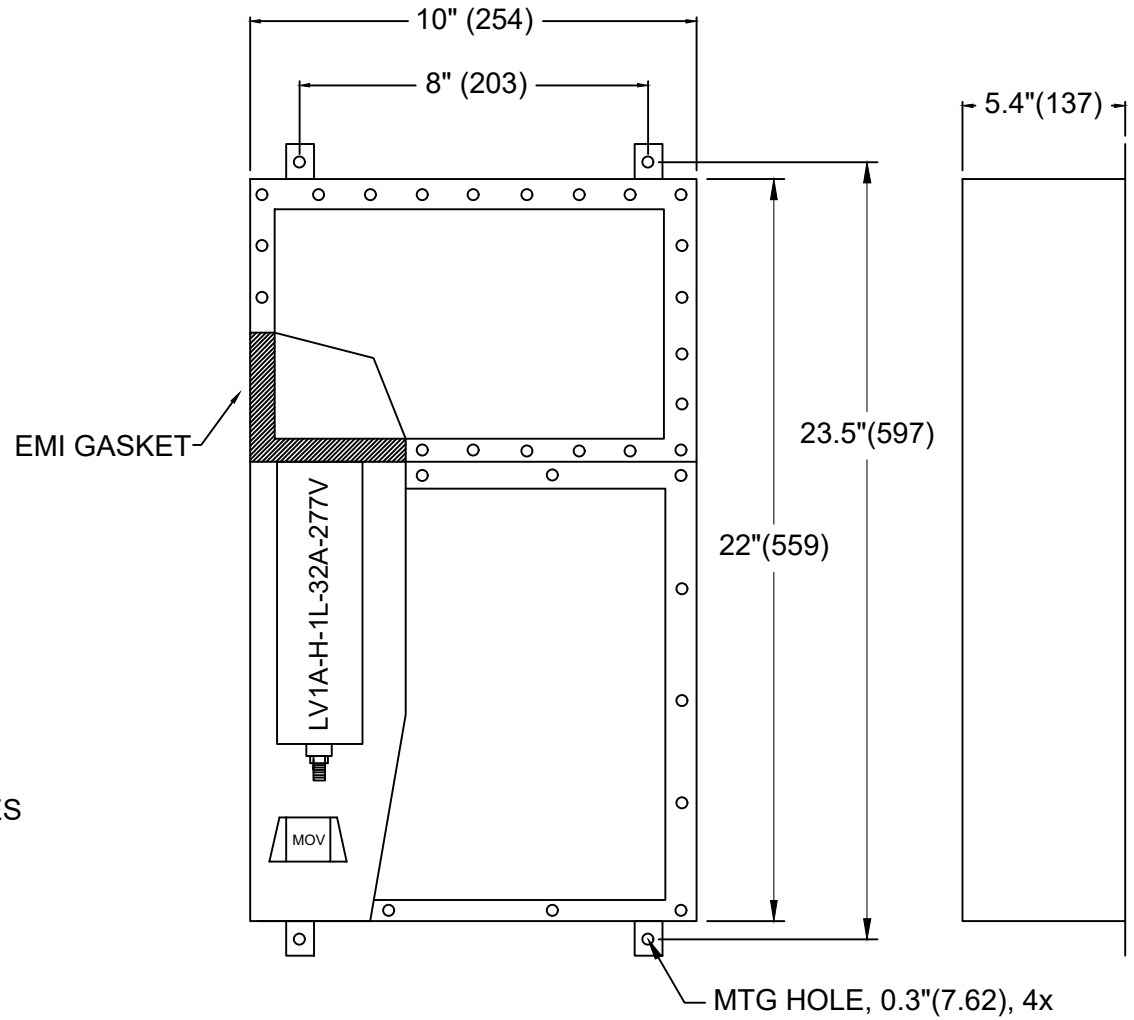

U.S. Patent# US11,102,918 B2

Conforms to UL STD 1283

5026929

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-H-2L-32A-480V	
TSS USA, LLC	REV:
CAGE CODE	**PROPRIETARY NOTE:** NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	