2-LINE + GROUND 800A HEMP FILTER

SPECIFICATIONS

RATED VOLTAGE: 0-277/0-480VAC
RATED CURRENT: 800A
FREQUENCY: 50/60HZ
OPER. TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: M16 (3x) WITH CU TERMINATION PLATE
DISCHARGE VOLTAGE (@277V): <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
PERFORMANCE: MIL-STD-188-125-1A
TYP. WEIGHT, LBS(KG): TBD
MOV: RATED 70KA, MINIMUM
MANUFACTURED IN ACCORDANCE

WITH THE FOLLOWING STANDARDS:

UL1283
MIL-STD-220
MIL-F-15733
MIL-STD-810

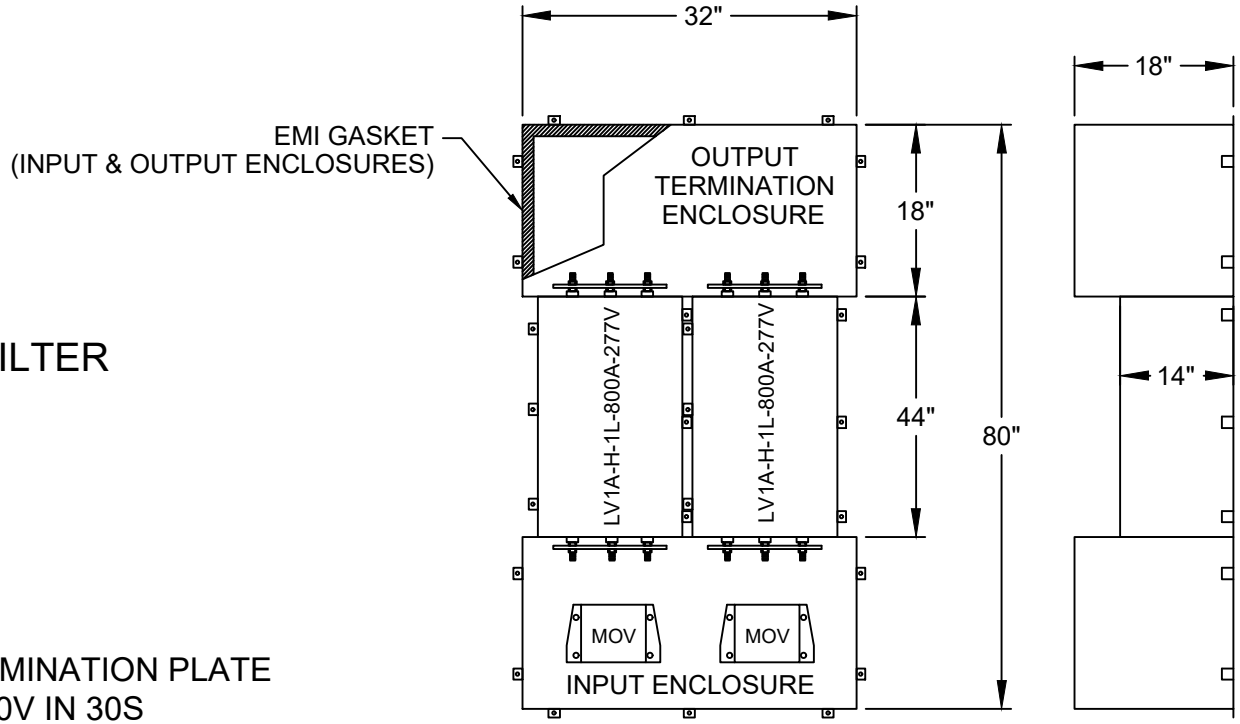

PER LINE END VIEW

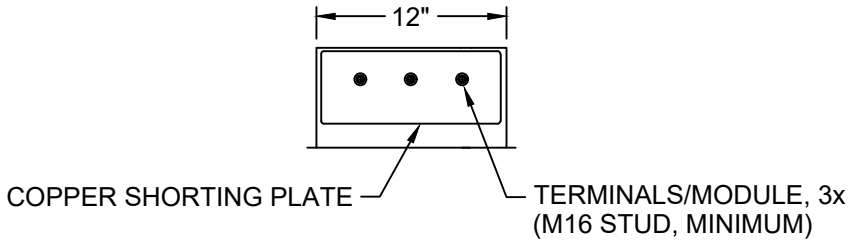

Made in the USA

LV1A-H-2L-800A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	