LV1A-H-3L-600A-480V

TSS 600A, 3-LINE MODULAR HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
MAX CURRENT: 600A/LINE
FREQUENCY: 50/60HZ
OPERATING TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
DISCHARGE VOLT. (@277V): <30V IN 30S
VOLT. DROP: <2% MAX AT UNITY LOAD
PERFORMANCE: MIL-STD-188-125-1A

GROUND STUDS PROVIDED IN EACH TERMINATION ENCLOSURE

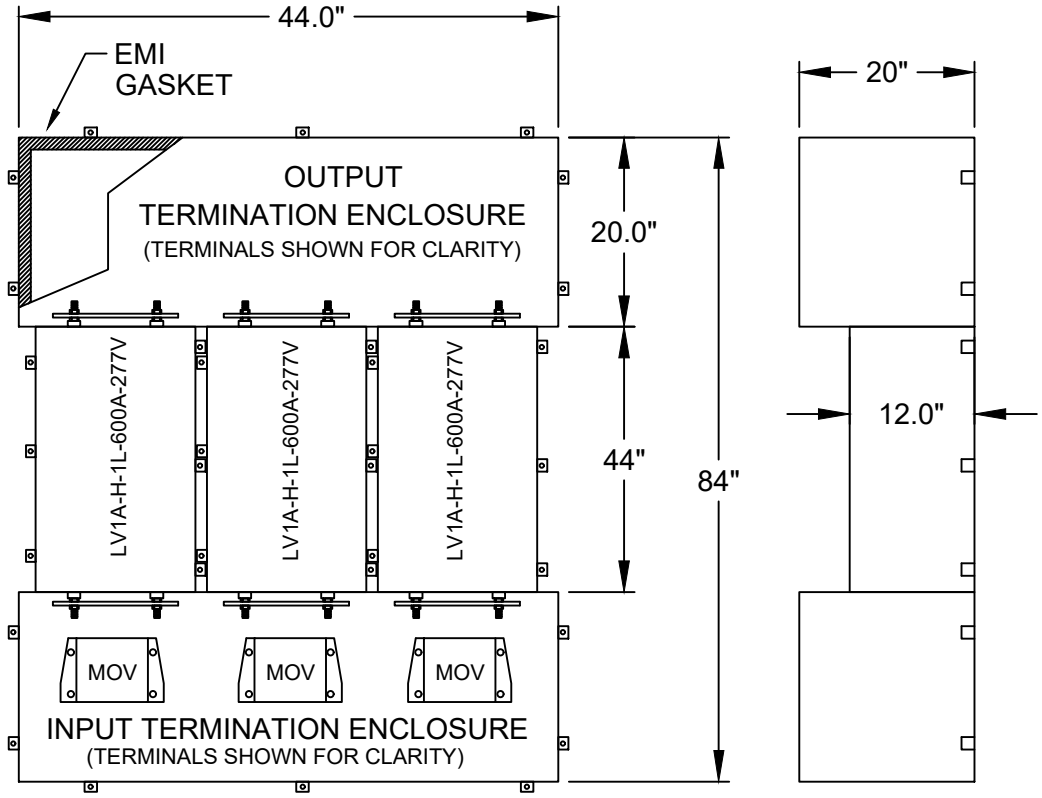

PER LINE END VIEW

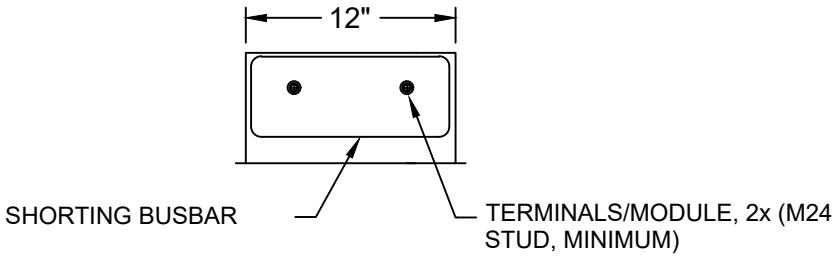

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-H-3L-600A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	