3PH+N / 4-LINE + GROUND HEMP FILTER

SPECIFICATIONS

- MAX VOLTAGE: 0-277/0-480VAC
- RATED CURRENT: 100A/LINE
- OPERATING TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- TERMINALS: M10
- DISCHARGE VOLTAGE (@277V)
  <20V IN 1 MINUTE
- VOLTAGE DROP: <2% MAX AT FULL
  RATED UNITY LOAD
- PERFORMANCE: Mil-STD-188-125-1A
- TYP. WEIGHT, LBS (KG): 216 (98)
- GND STUD: M10 (EACH ACCESS AREA)

MANUFACTURED FOR WALL MOUNTING
FOR INDOOR CONTROLLED ENVIRONMENTS.
ALL EMI SEAMS 100% WELDED AND OUTPUT
ACCESS SEALED WITH EMI GASKET.

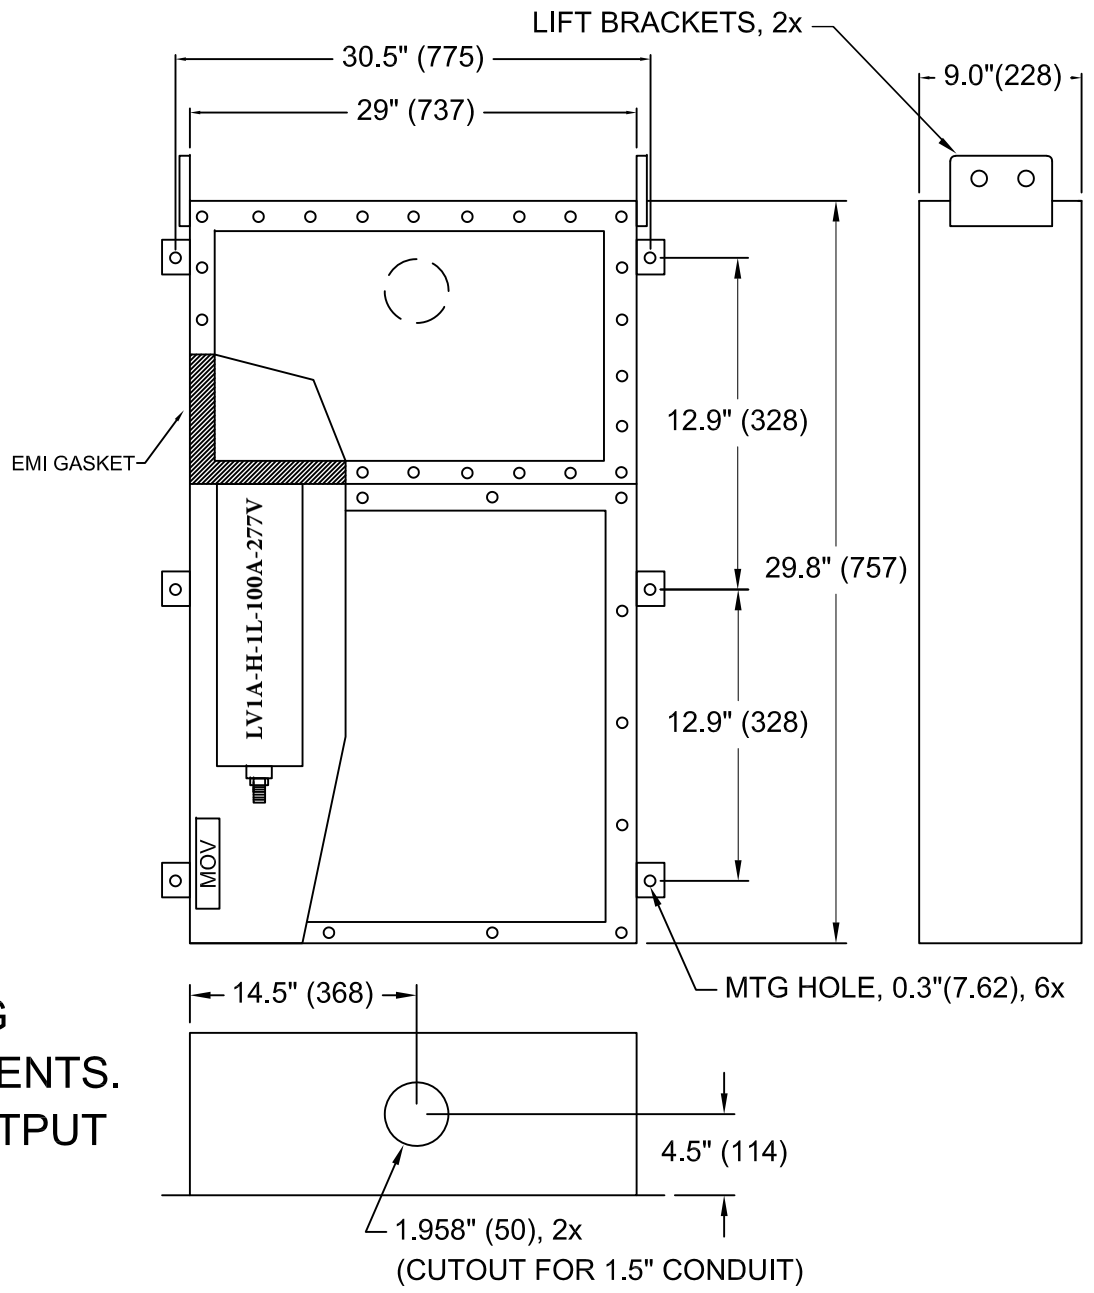

INTERTEK ETL LISTED US 5026929 Conforms to UL STD 1283

MADE IN THE USA

LV1A-H-4L-100A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	