3PH+N / 4-LINE + GROUND HEMP FILTER SPECIFICATIONS

MAX VOLTAGE: 0-277/0-480VAC
RATED CURRENT: 400A/LINE
OPERATING TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: DUAL M12
DISCHARGE VOLTAGE (@277V)
<20V IN 1 MINUTE
VOLTAGE DROP: <2% MAX AT FULL
RATED UNITY LOAD
PERFORMANCE: Mil-STD-188-125-1A
TYP. WEIGHT, LBS (KG): 605 (275)
GND STUD: M10 (EACH ACCESS AREA)

MANUFACTURED FOR WALL MOUNTING
FOR INDOOR CONTROLLED ENVIRONMENTS.
ALL EMI SEAMS 100% WELDED AND OUTPUT
ACCESS SEALED WITH EMI GASKET.

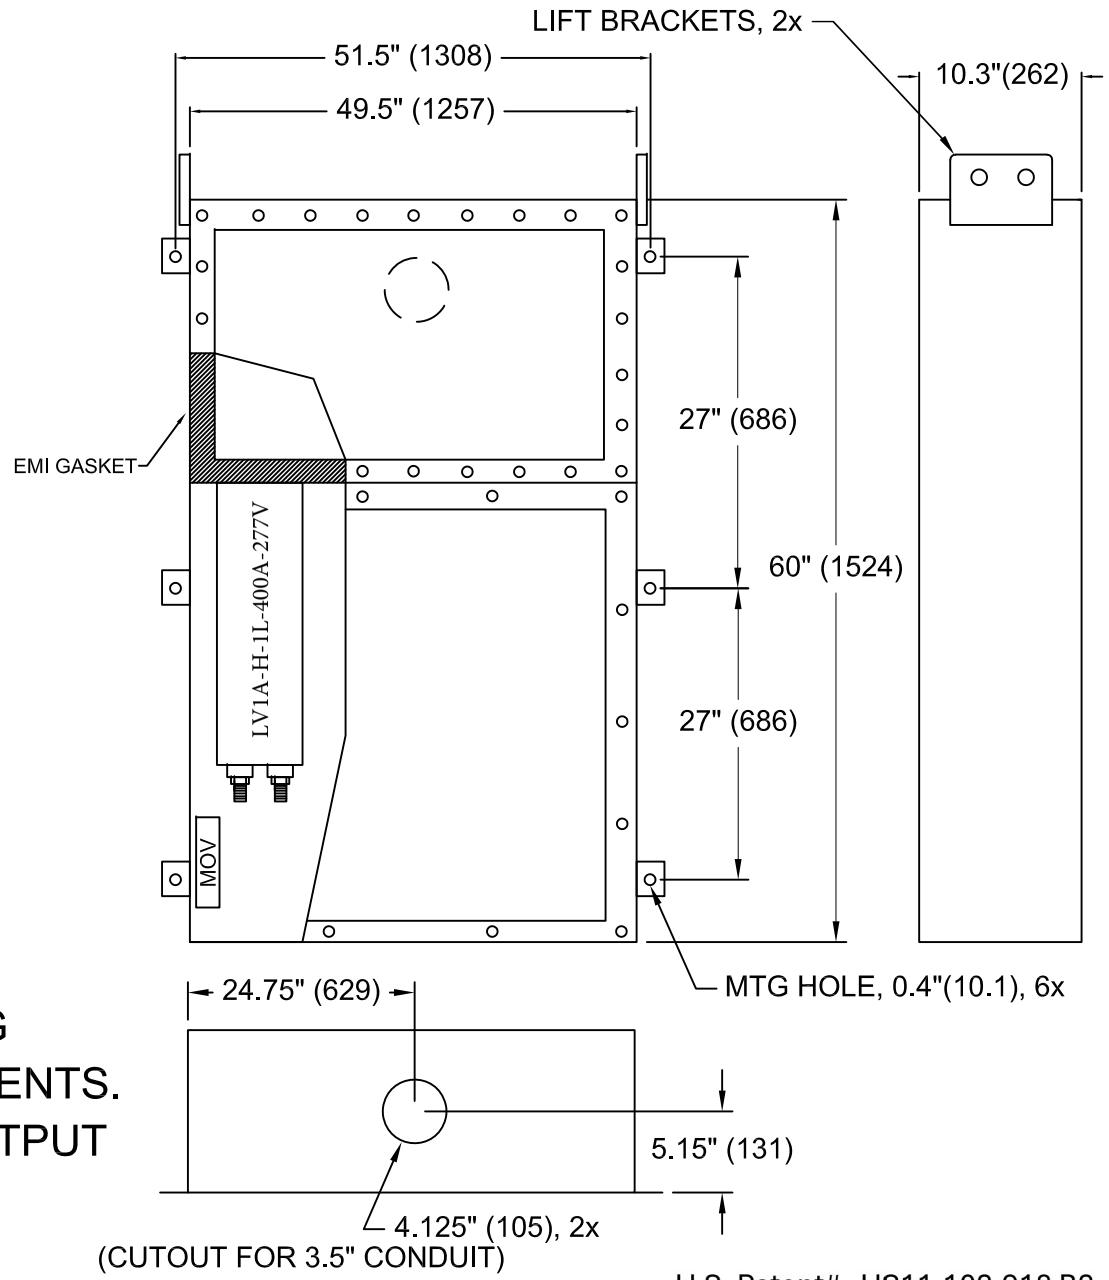

U.S. Patent# US11,102,918 B2

INTERTEK ETL LISTED 5026929 US Conforms to UL STD 1283

MADE IN THE USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-H-4L-400A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	