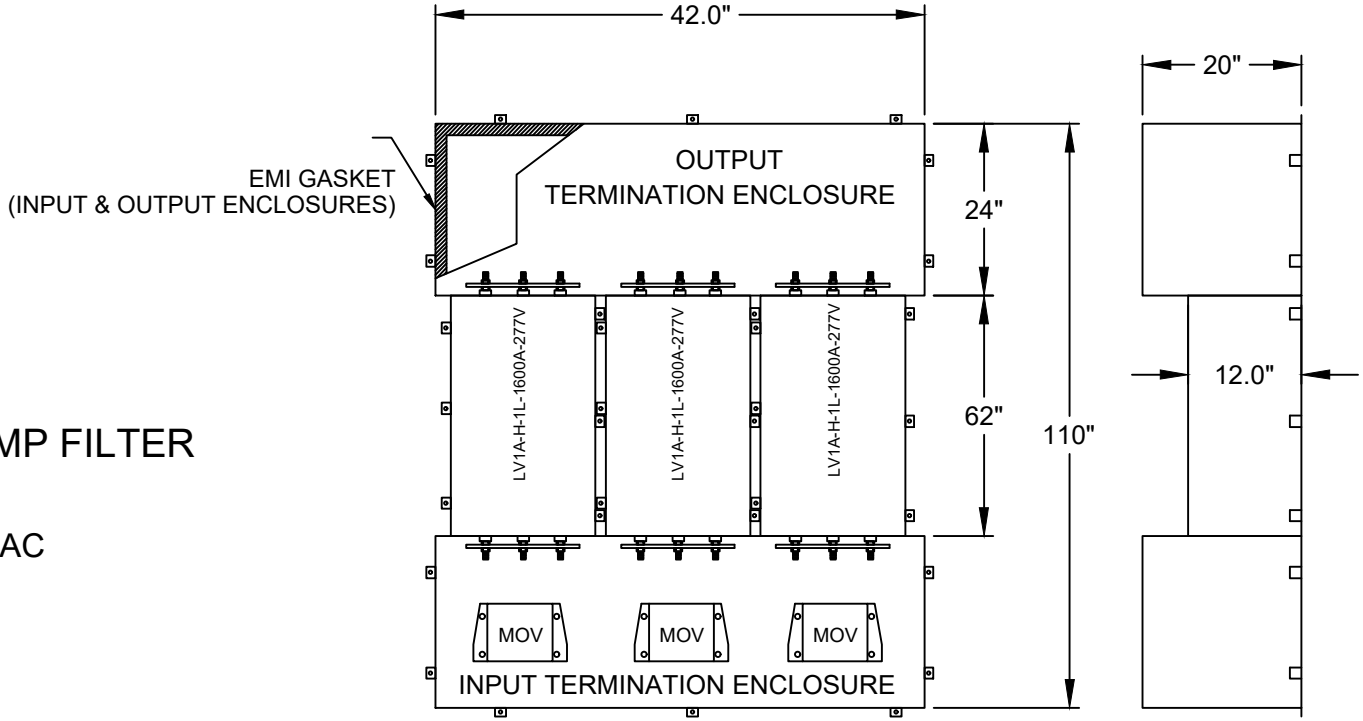

3-LINE + GROUND 1600A HEMP FILTER

SPECIFICATIONS

- RATED VOLTAGE: 0-277/0-480VAC
- RATED CURRENT: 1600A
- FREQUENCY: 50/60HZ
- OPER. TEMP.: -40 TO 65C
- HIPOT (L-G): 2200VDC
- TERMINALS: M24 (3x) WITH CU TERMINATION PLATE
- DISCHARGE VOLTAGE (@277V): <30V IN 30S
- VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
- OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
- PERFORMANCE: MIL-STD-188-125-1A
- TYP. WEIGHT, LBS(KG): TBD
- MOV: RATED 70KA, MINIMUM
- MANUFACTURED IN ACCORDANCE
  - WITH THE FOLLOWING STANDARDS:
    - UL1283
    - MIL-STD-220
    - MIL-F-15733
    - MIL-STD-810

PER LINE END VIEW

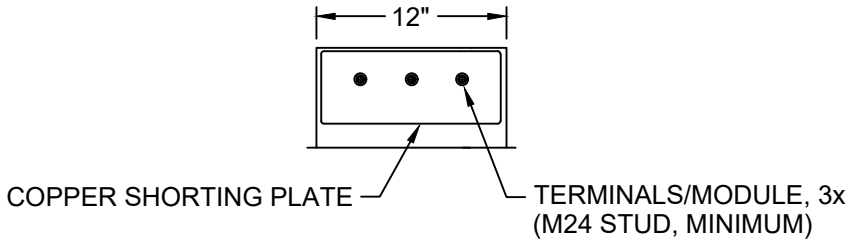

Made in the USA

LV1A-H-3L-1600A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE:
56NX9	NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.