# 3-LINE + GROUND 2400A HEMP FILTER

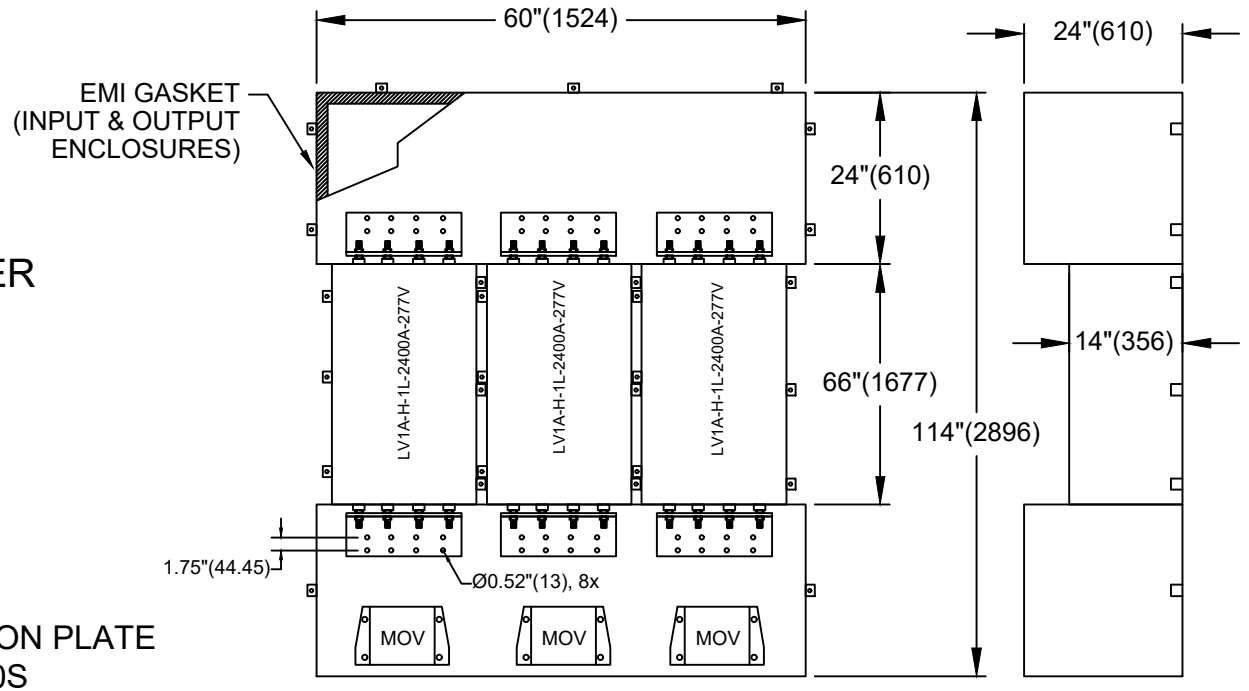


## SPECIFICATIONS

RATED VOLTAGE: 0-277/0-480VAC
RATED CURRENT: 2400A

FREQUENCY: 50/60HZ
OPER. TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: M24 (4x) WITH CU TERMINATION PLATE
DISCHARGE VOLTAGE (@277V): <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
PERFORMANCE: MIL-STD-188-125-1A
TYP. WEIGHT, LBS(KG): TBD
MOV: RATED 70KA, MINIMUM
MANUFACTURED IN ACCORDANCE

WITH THE FOLLOWING STANDARDS:

UL1283
MIL-STD-220
MIL-F-15733
MIL-STD-810

## PER LINE END VIEW

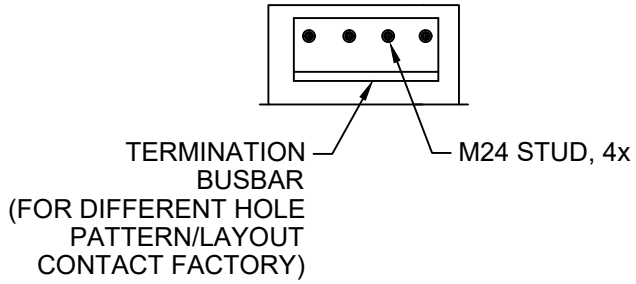


U.S. Patent# US11,102,918 B2

**Made in the USA**

SPECIFICATIONS SUBJECT TO CHANGE

| LV1A-H-3L-2400A-480V | |
|---|---|
| TSS USA, LLC | REV: |
| CAGE CODE | PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER. |
| 56NX9 | |