4-LINE + GROUND 2400A HEMP FILTER

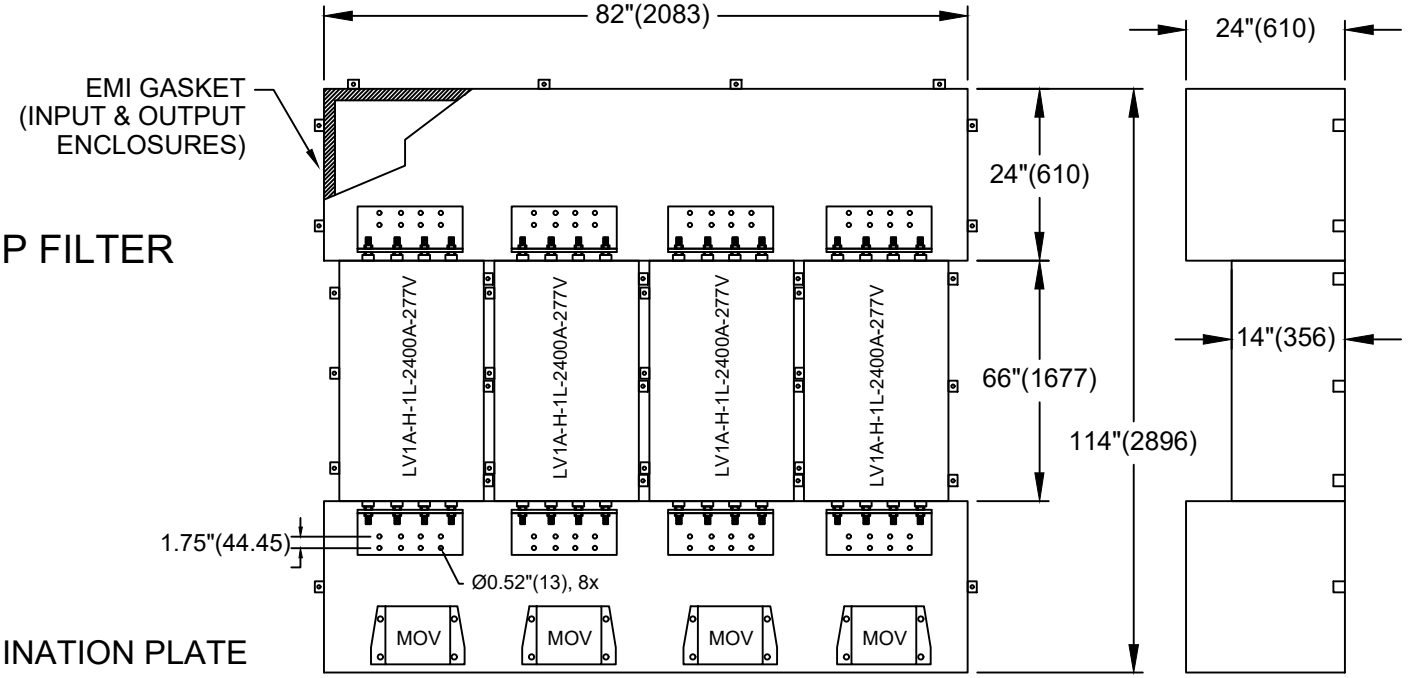

SPECIFICATIONS

RATED VOLTAGE: 0-277/0-480VAC
RATED CURRENT: 2400A
FREQUENCY: 50/60HZ
OPER. TEMP.: -40 TO 65C
HIPOT (L-G): 2200VDC
TERMINALS: M24 (4x) WITH CU TERMINATION PLATE
DISCHARGE VOLTAGE (@277V): <30V IN 30S
VOLTAGE DROP: <2% AT FULL RATED UNITY LOAD
OVERLOAD: 140% RATED CURRENT FOR 15 MINUTES
PERFORMANCE: MIL-STD-188-125-1A
TYP. WEIGHT, LBS(KG): TBD
MOV: RATED 70KA, MINIMUM
MANUFACTURED IN ACCORDANCE
WITH THE FOLLOWING STANDARDS:

UL1283
MIL-STD-220
MIL-F-15733
MIL-STD-810

INTERTEK ETL LISTED US Conforms to UL STD 1283
5026929

PER LINE END VIEW



TERMINATION BUSBAR
(FOR DIFFERENT HOLE
PATTERN/LAYOUT
CONTACT FACTORY)

M24 STUD, 4x

U.S. Patent# US11,102,918 B2

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-H-4L-2400A-480V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE:
56NX9	NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.