2-LINE HEMP FILTER ANALOG ALARM/CONTROL/LIGHTING

SPECIFICATIONS

MAX VOLTAGE: 0-250VAC/0-250VDC
OPERATING FREQUENCY: DC-60HZ
RATED CURRENT: 2A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
(PRIOR TO INSTALLING DISCHARGE RESISTORS)
DISCHARGE VOLT. (@250V): <30V IN 30S
PERFORMANCE: 100dB (14KHZ TO 20GHZ)
TYP. WEIGHT, LB(KG): 8.0(3.6)
LINE TERMINALS: M5 STUDS
LOAD TERMINALS: 18GA WIRES

Mil-Std-188-125-1A Compliant

ADDITIONAL DETAILS:

1. FOR INDOOR CONTROLLED ENVIRONMENTS
2. ALL EMI SEAMS 100% WELDED
3. FOR DIFFERENT CONDUIT CUTOUT OR HOLE LOCATION, CONSULT FACTORY

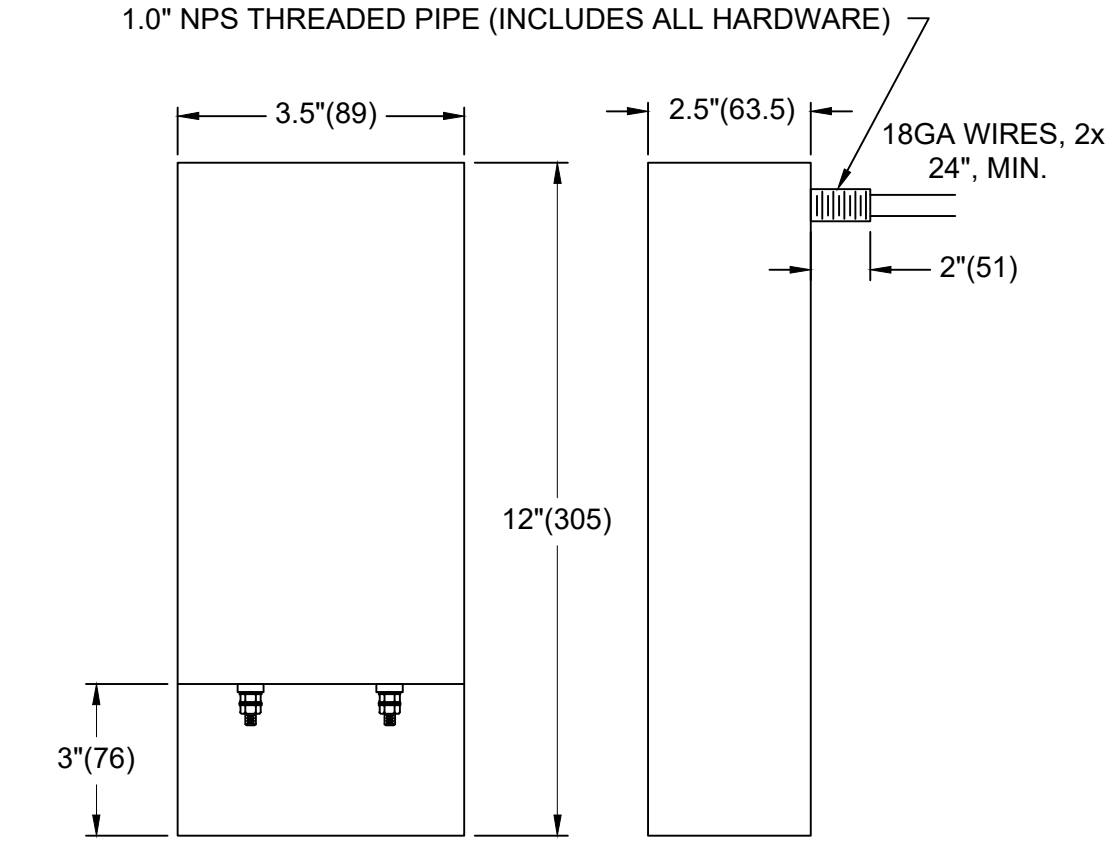

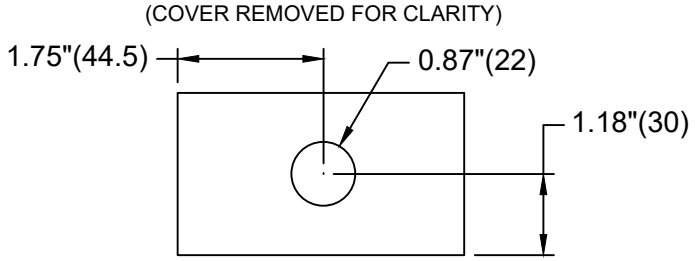

U.S. Patent# US11,102,918 B2

LV1A-HC-C2L-2A-250VAC-24VDC	
TSS USA, LLC	REV:
CAGE CODE	**PROPRIETARY NOTE:** NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE