2 line 2 amp DATA LINE FILTER

SPECIFICATIONS

OPER. VOLTAGE: 0-24VDC MAX
RATED CURRENT: 5A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
TERMINALS: M5 STUDS
TYP. WEIGHT, LB(KG): 8.0(3.6)
PERFORMANCE: MIL-STD-188-125-1A
COMPOSITE HOUSING

VIEW WITH ACCESS COVERS REMOVED

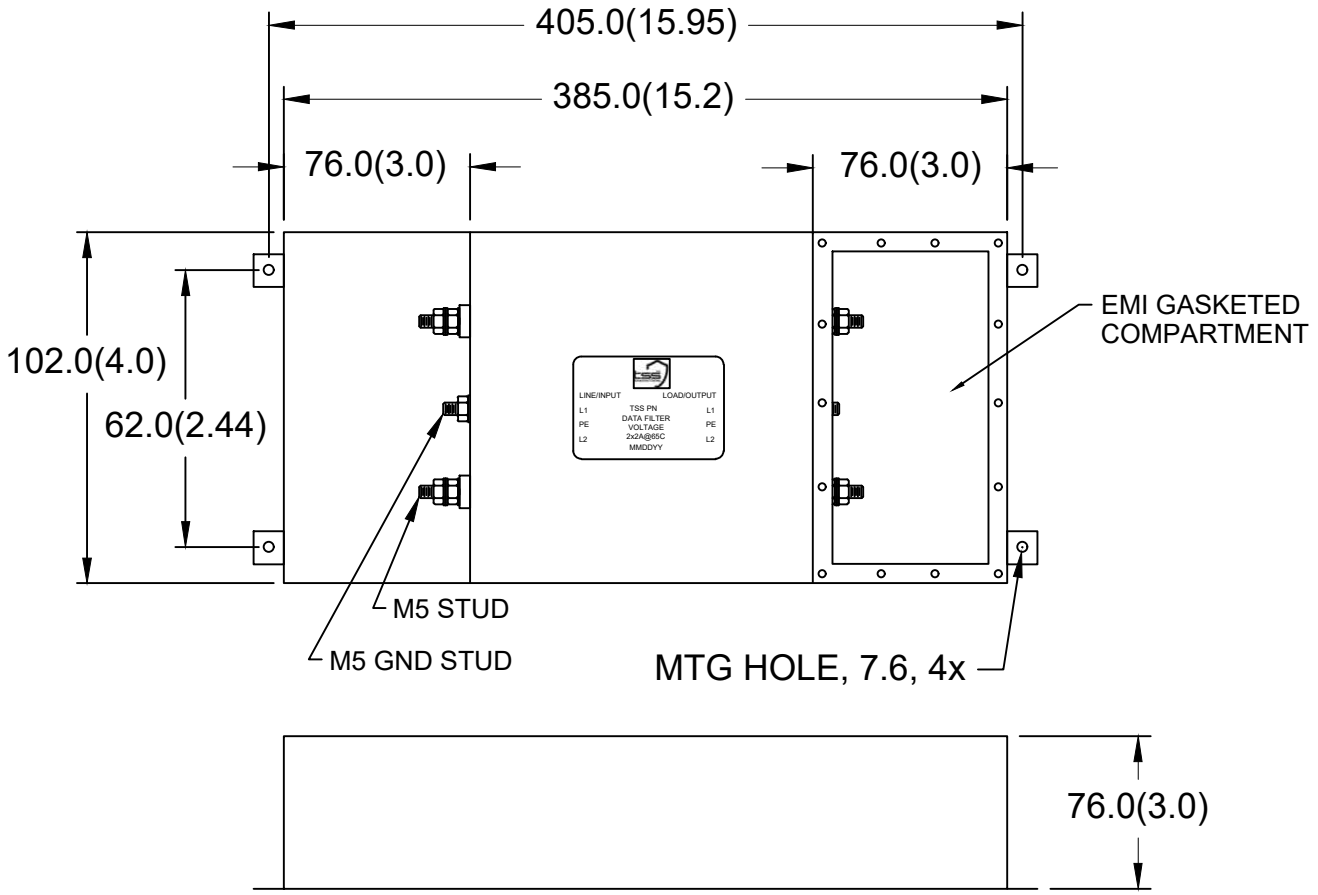

NOTE: MOVS ARE ATTACHED DIRECTLY TO THE LINE/INPUT TERMINALS AND THE GROUIND STUD.

INTERTEK ETL LISTED US 5026929 Conforms to UL STD 1283

U.S. Patent# US11,102,918 B2

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE

LV1A-HD-C2L-2A-24VDC	
TSS USA, LLC	REV:
CAGE CODE	**PROPRIETARY NOTE:** NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	