Composite HEMP 6 line, 2 amp, Data line filter

VIEW WITH ACCESS COVERS REMOVED

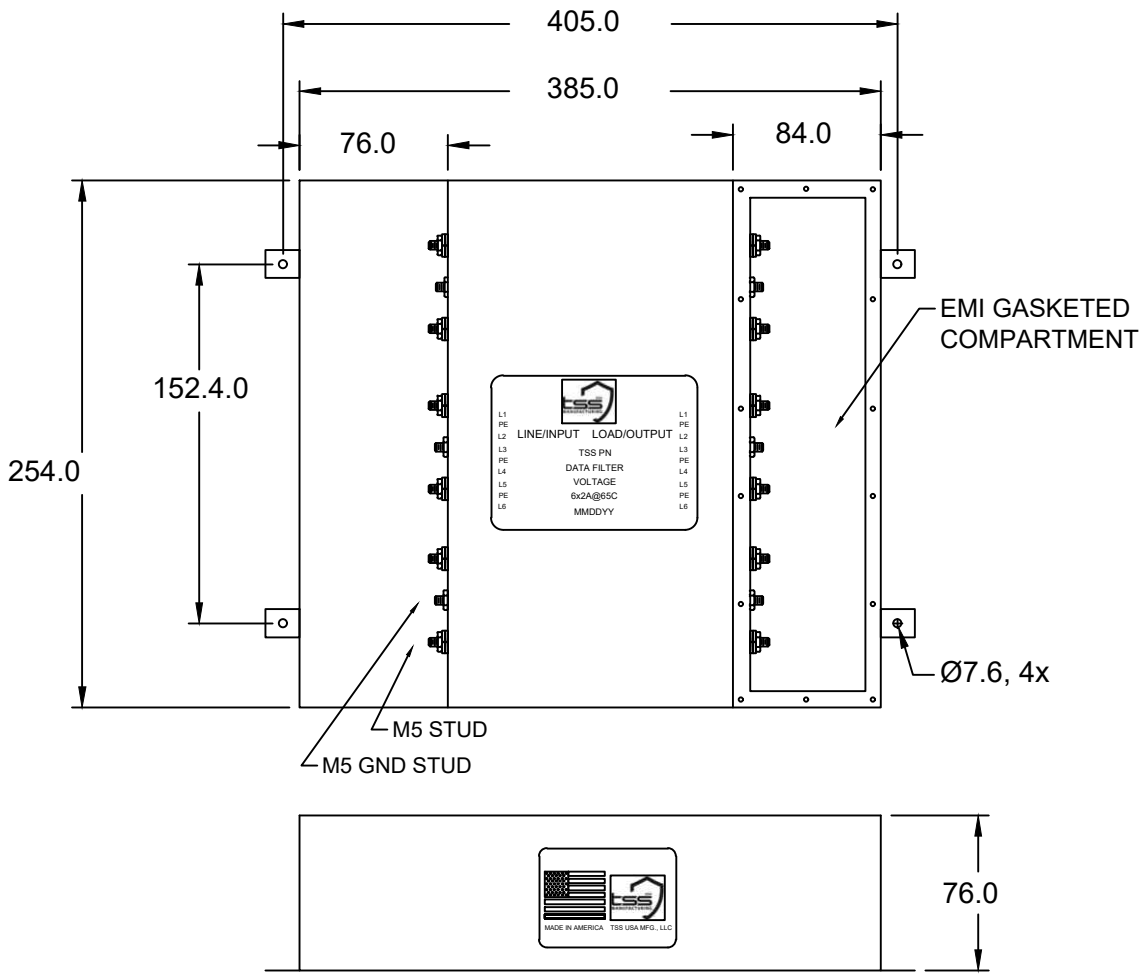

SPECIFICATIONS

OPER. VOLTAGE: 0-250VAC
MAX RATED CURRENT: 2A/LINE
AMBIENT TEMP.: -40 TO 65C
HIPOT (L-G): 1000VDC
TERMINALS: M5
TYP. WEIGHT, LB(KG): 18.0(8.2)
PERFORMANCE: MIL-STD-188-125-1A

NOTE: MOVS ARE ATTACHED DIRECTLY TO THE LINE/INPUT TERMINALS AND THE GROUIND STUD.

DIMENSIONS IN MM

U.S. Patent# US11,102,918 B2

LV1A-HD-C6L-2A-250V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE