4-LINE + GROUND HEMP FILTER

SPECIFICATIONS

MAX VOLTAGE: 2400/4160VAC

RATED CURRENT: 1200A/LINE OPERATING

TEMP.: -40 TO 65C

HIPOT (L-G): 10,00VDC

TERMINALS: 10x75MM BUSBARS

DISCHARGE VOLT. (@277V): <30V IN 30S

VOLT. DROP: <2% FULL RATED UNITY LOAD

PERFORMANCE: MIL-STD-188-125-1A

EST. WEIGHT, LBS (KG): TBD

MANUFACTURED FOR

INDOOR CONTROLLED

ENVIRONMENTS. ALL EMI SEAMS 100%

WELDED. EMC TERMINATION ENCLOSURES

SEALED WITH EMI GASKET.

NOTE: Meets Mil-Std-188-125-1A as defined by DTRA for medium voltage filters.

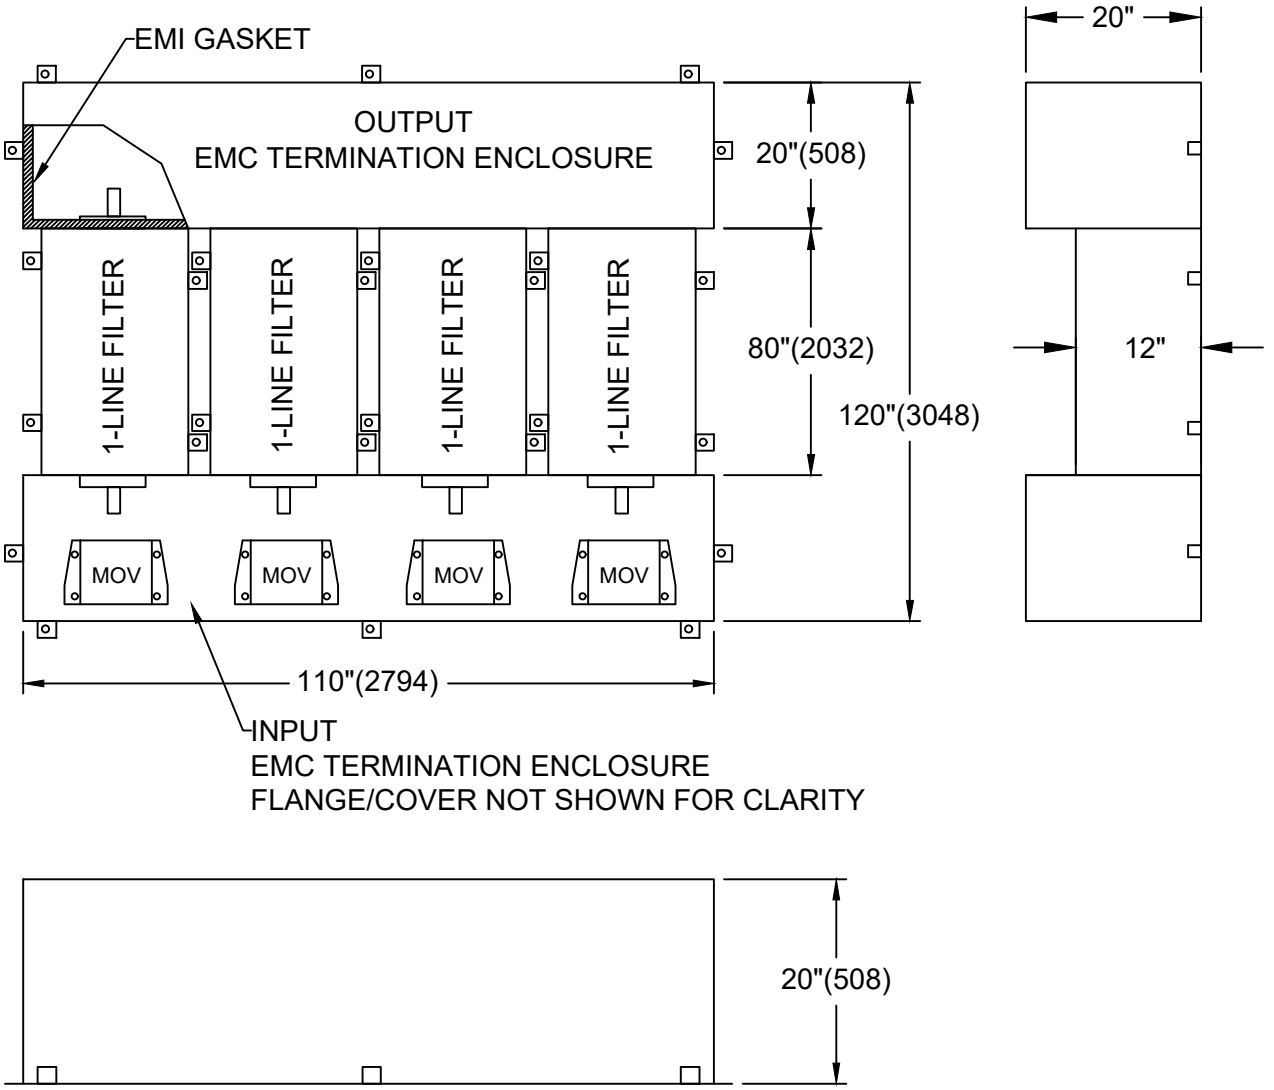

U.S. Patent# US11,102,918 B2

MV5K-4L-1200A-4160V	
TSS USA, LLC	REV:
CAGE CODE	PROPRIETARY NOTE: NOTICE TO ALL PERSONS RECEIVING THIS DRAWING. THIS DOCUMENT IS THE PROPERTY OF TSSUSA AND IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART OR USED FOR MANUFACTURING PURPOSES BY ANYONE WITHOUT THE CONSENT OF TSS AND PREMIER.
56NX9	

Made in the USA

SPECIFICATIONS SUBJECT TO CHANGE